

TECHNICAL DATA SHEET

Ref. 500026

Unipolar battery

MASTER SWITCH

24VDC / 75A



GENERAL CHARACTERISTICS

Protection degree: ZB200h anticorrosion
Ambient temperature: -40°C to +85°C
Weight: 0.065 Kg approx.
Contacts: Brass
Connections: not polarized

FIELDS OF APPLICATION

Handling vehicles, industrial vehicles,
agriculture machinery, industry...

POWER CIRCUIT

Connection: M8 terminals
Tightening torque: 1.2 +/- 0.1 daN·m
Type: unipolar normally open
Nominal current: 75 A
Nominal voltage: 24 VDC
Max. capacity: 200 A during 5 seconds


PARTICULAR CHARACTERISTICS:

Screw control


SPARE PARTS

Black screw 520008


Size diagrams

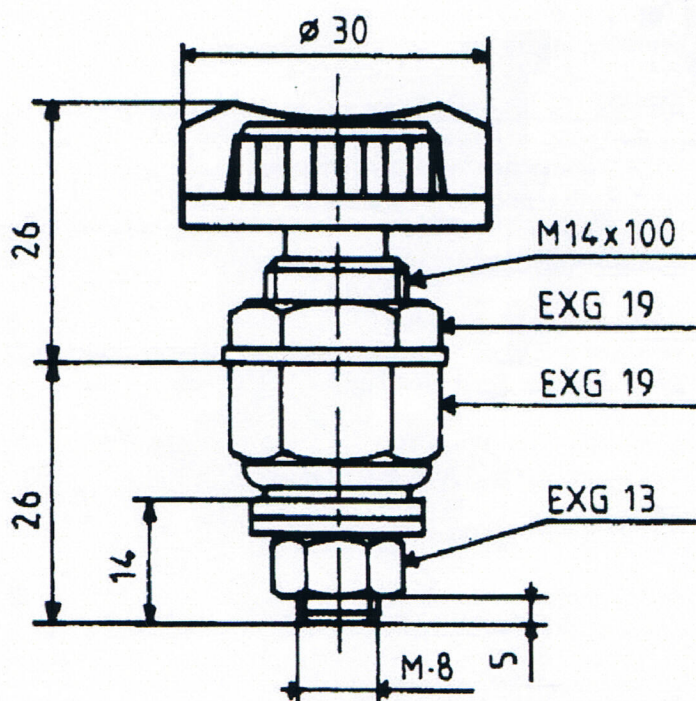

Connection diagram



Fixing diagram



P.I. El Raíguer, C/ El Raíguer, s/n, NAVE Nº21-22
08170 MONTORNÈS DEL VALLÈS
BARCELONA (SPAIN)

Tel. : + 34.93.544.44.80 - Fax : + 34.93.544.44.90

WWW.CORMAR.ES - info@cormar.es