








BOX
EXTERIOR
WALL SURFACE

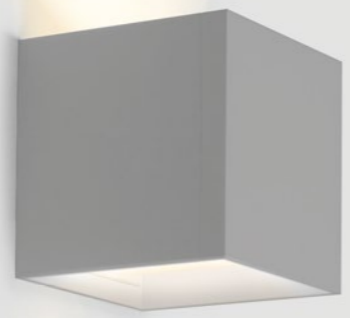

1.0

LED 4W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.60kg IP65

3000K | >80 CRI | 420lm

	CODE
	714164W4
	714164D4
	714164B4

2.0

2xLED 4W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.66kg IP65

3000K | >80 CRI | 2x340lm

	CODE
	714144W4
	714144D4
	714144B4

OPTIONAL

flaps for adjustable beam angle
CODE
900401W0

3.0

LED 4W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.67kg IP65

3000K | >80 CRI | 420lm

	CODE
	714264W4
	714264D4
	714264B4

4.0

2xLED 4W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.86kg IP65

3000K | >80 CRI | 2x340lm

	CODE
	714244W4
	714244D4
	714244B4

OPTIONAL

flaps for adjustable beam angle
CODE
900401W0