

Electric heaters

Aqua HL 3-15kW


Aqua HL has a digital control, where the desired pool temperature can easily be set and the current pool temperature is shown in the LED display. In addition to an overheating protection and a flow switch, the heater has built-in contactors, that simplifies the connection of the heater.

Rated output 3-15 kW. Made of thermoplastic with heating element made of Incoloy 825 or titanium.

Suitable for private pools up to 100 m³.
Minimum flow 90 l/min.

Features

- Capacity range 3-15kW
- Aqua HL comes with contactors and electronics
- Digital control and display
- Made of reinforced thermoplastic
- Horizontal installation, eliminates air pockets and damage to the electric heating element.
- Heating elements of Incoloy 825 or titanium
- Equipped with overheating limit control and flow switch
- Dual built-in contactors as per electrical safety standards
- Third-party tested and certified
- Slip connections for bonding of Ø 50 mm pipes

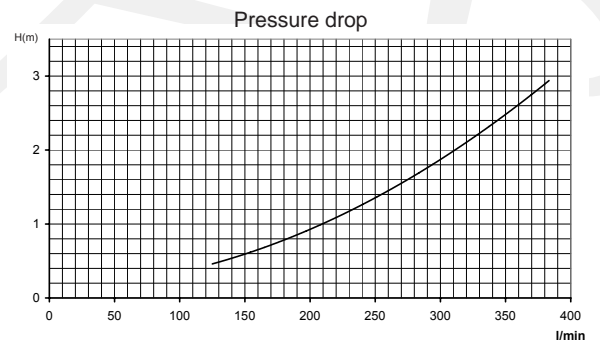

Technical data							
Heating element, Incoloy 825			Heating element, titanium		Ampere 3-phase/kW		
Item no.	Type	kg	Item no.	Type	kg	400V	415V
141800	D30	2.6	141800T	D30T	2.55	3.0kW 5A	3.5kW 5A
141801	D60	2.6	141801T	D60T	2.55	6.0kW 9A	6.5kW 9A
141802	D90	2.6	141802T	D90T	2.55	9.0kW 13A	10kW 14A
141803	D120	2.6	141803T	D120T	3.0	12.0kW 18A	13kW 18A
141804	D150	3.0	141804T	D150T	3.0	15.0kW 22A	16.2kW 23A
					1-phase 230V		3-phase 230V
141820	DS30-230	2.6	141820T	DS30T-230	2.55	3.0kW 13A	-
141821	DS60-230	2.6	141821T	DS60T-230	2.55	6.0kW 26A	-
141830	D30-230	2.6	141830T	D30T-230	2.55	-	3kW 8A
141831	D60-230	2.6	141831T	D60T-230	2.55	-	6kW 15A
141832	D90-230	2.6	141832T	-	2.55	-	9kW 23A

Also available with connections 1 1/2" pipe or 1 1/2" threaded.