


ZS-Q 1.5, ZS-Q 2.5



| | ZS-Q 1.5 | ZS-Q 2.5 |
|--|--------------------------------|----------------------------------|
| Q _{nom} | 1,5 m ³ /h | 2,5 m ³ /h |
| Q _{min} | 30 l/h | 50 l/h |
| Q _{max} | 3 m ³ /h | 5 m ³ /h |
| Q _t | 120 l/h | 200 l/h |
| Klasse / Class / Classe / Klasse | B | |
| T _{max} | 90 °C | |
| p _{max} | 10 bar | |
| Signal / Signal / Signal / Signaal | 1 l/imp | |
| Reed Kontakt / Reed contact / Contact reed / Reed contact | 24V AC/DC, 0.01 A max | |
| Toleranz / Tolerance / Tolérance / Tolerantie | ±5% (<90 l/h) ±2% (>90 l/h) | ±5% (<150 l/h) ±2% (>150 l/h) |

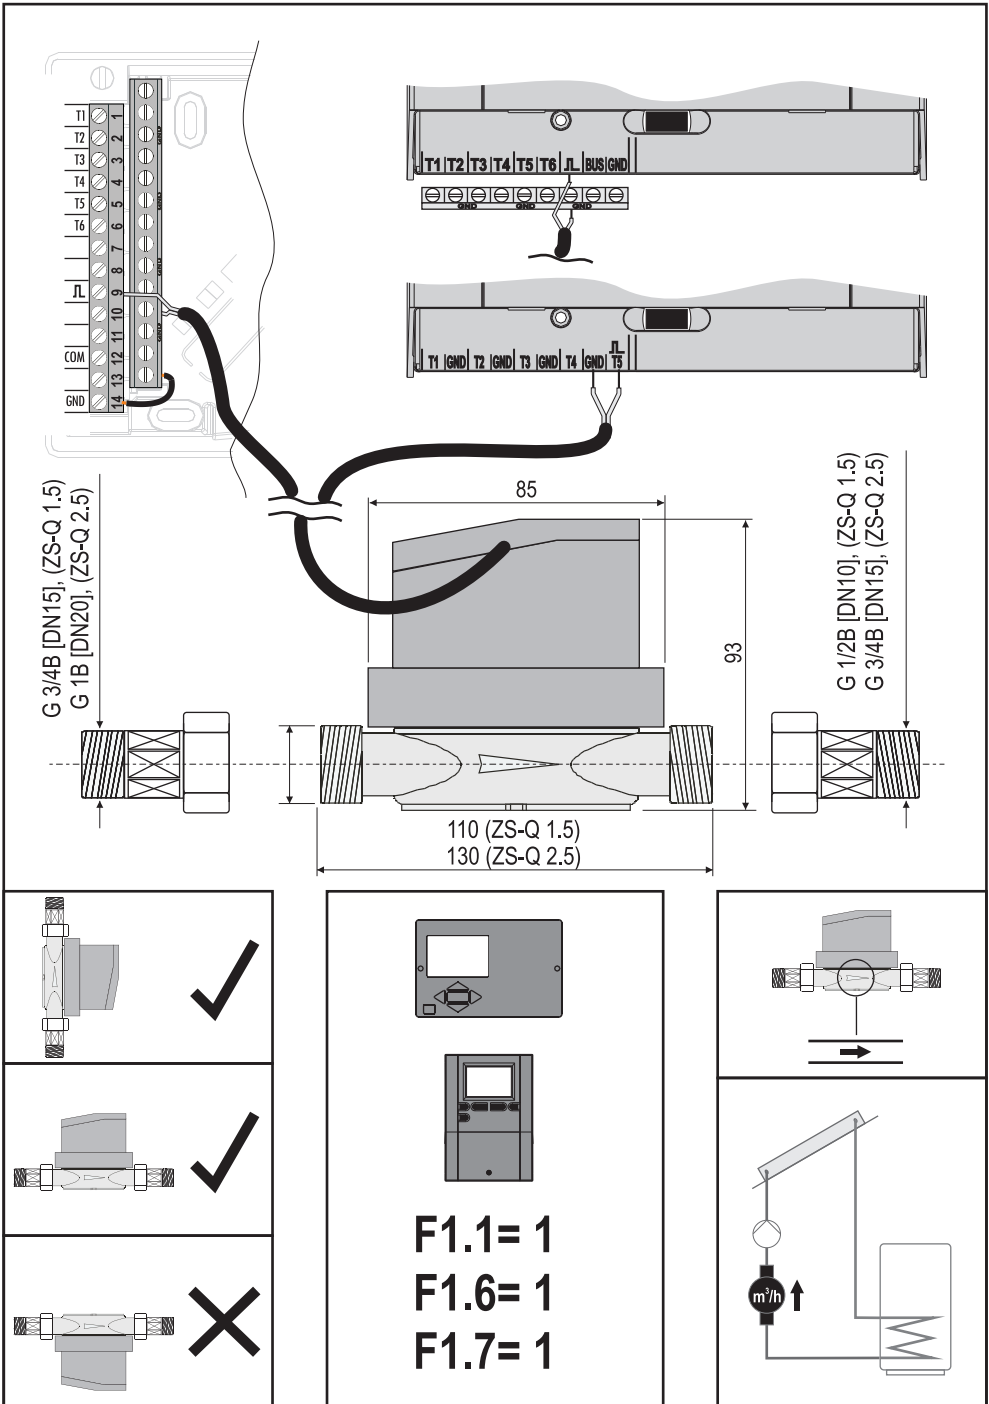