




## RIV 17

Two-flange piston gate valve  
with single-acting hydraulic jack  
with O-ring gaskets

### Tech drawings and tables

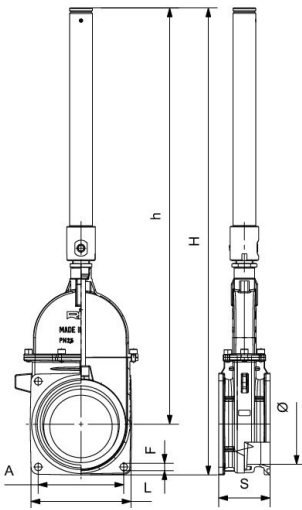


DN	Code	Ø	H	h	S	L	F	A	PN	KG	P/box
4"	050017000016	91	740	651	97	180	13	150	3bar - 45psi	8,499	1
5"	050017000018	120	782	693	90	180	13	150	3bar - 45psi	10,223	1
6"	050017000019	143	817	728	90	180	13	150	2,5bar - 37psi	10,898	1
8"	050017000020	191	1021	907	111	230	13	180	1,5bar - 21psi	19,627	1

### Advantages

Better tightness compared to other gate valves of the same type.  
Anticorrosion stainless steel screws.  
In accordance with 97/23/CE (PED) Directive.

## Technical data

Art. 10

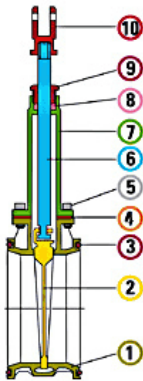

### Materials

1	Body	Brass	CB754S
2	Wedge	Brass	CB754S
3	O-Ring	NBR	
4	Gasket	Fibre	
5	Screw	Stainless Steel	AISI 304
6	Stem	Brass	CW614N
7	Cap	Brass	CB754S
8	Tow packing	Fibre	
9	Stuffing-Box	Brass	CW614N
10	Fork	Brass	CW617N

### Connections

ISO 228/1, NPT, Square flange

### Limit

-20°C (without liquid) +90°C

### Notes

The max. working pressure (PN) means at a room temperature of about 23°C.