

JKM275M-96

MONO CRYSTALLINE MODULE 255-275 Watt

Jinko Solar introduces a brand-new line of high performance modules in wide application.



KEY FEATURES



High module conversion efficiency (up to 16.14%), through superior manufacturing technology



Withstand high wind load (2400Pa) and snow load (5400Pa)



Anti-reflective coating improves light absorption and reduces surface dust



Low nominal operating cell temperature (NOCT) delivers better power and performance over time




Extreme environment durability, low power degradation under high temperature

QUALITY&SAFETY

- Positive power tolerance of -0/+3% *
- 10 year warranty on material & workmanship *
- Industry leading power output warranty (12 years/90%, 25 years/80%)
- Premium linear performance warranty *

Premium Performance Warranty

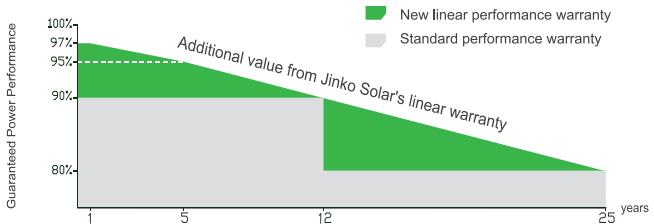

* Based on customer requirements and contract terms

ISO9001:2008、ISO14001:2004、OHSAS18001 certified factory
IEC61215、IEC61730、IEC61701、IEC62716 certified products

APPLICATIONS



On-grid residential
roof-tops



On-grid commercial/
industrial roof-tops




Solar power plants



Off-grid systems

Engineering Drawings

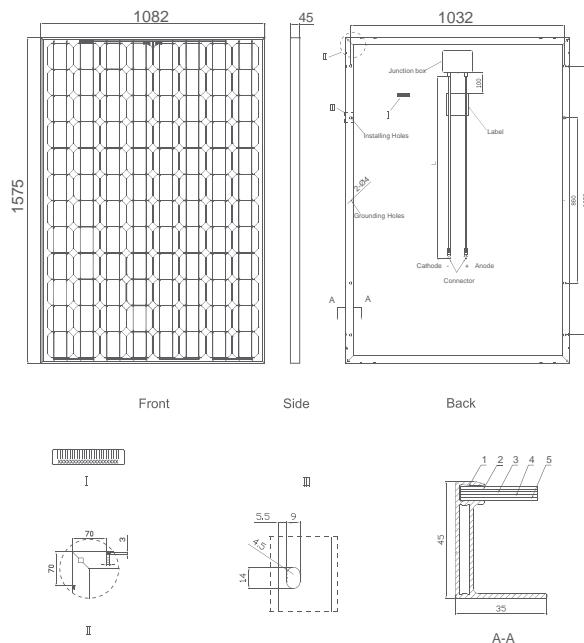

Packaging Configuration


(Two boxes =One pallet)

23 pcs/box, 46 pcs/pallet, 644 pcs/40'HQ Container


Electrical Performance & Temperature Dependence

Current-Voltage & Power-Voltage Curves (260W)

1000 W/m² 600 W/m²
800 W/m² 400 W/m²

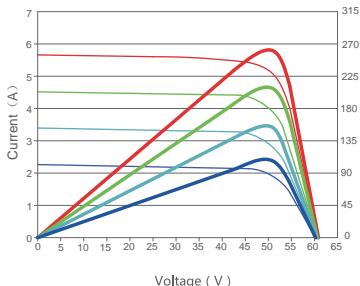

Temperature Dependence of Isc,Voc,Pmax

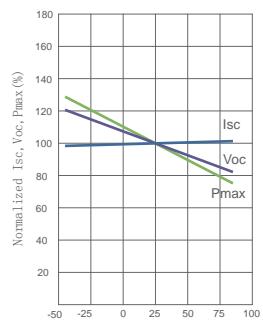

Mechanical Characteristics

Cell Type	Mono-crystalline 125×125mm (5 inch)
No.of cells	96 (8×12)
Dimensions	1575×1082×45mm (61.85×42.63×1.77 inch)
Weight	20.0 kg (44.1 lbs.)
Front Glass	3.2mm, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminum Alloy
Junction Box	IP65 Rated
Output Cables	TÜV 1×4.0mm ² Length:900mm

SPECIFICATIONS

Module Type	JKM255M		JKM260M		JKM265M		JKM270M		JKM275M									
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT								
Maximum Power (Pmax)	255Wp	188Wp	260Wp	191Wp	265Wp	195Wp	270Wp	199Wp	275Wp	203Wp								
Maximum Power Voltage (Vmp)	50.0V	46.2V	50.5V	46.7V	51.0V	47.1V	51.5V	47.6V	51.9V	48.0V								
Maximum Power Current (Imp)	5.10A	4.07A	5.15A	4.09A	5.20A	4.14A	5.24A	4.19A	5.30A	4.23A								
Open-circuit Voltage (Voc)	60.5V	55.9V	61.1V	56.5V	61.7V	57.1V	62.3V	57.6V	62.8V	58.1V								
Short-circuit Current (Isc)	5.66A	4.54A	5.72A	4.59A	5.77A	4.63A	5.82A	4.67A	5.84A	4.69A								
Module Efficiency STC (%)	14.97%		15.26%		15.55%		15.85%		16.14%									
Operating Temperature(°C)	-40°C~+85°C																	
Maximum system voltage	1000VDC (IEC)																	
Maximum series fuse rating	10A																	
Power tolerance	±3% / -0~+3% (Based on customer requirements and contract terms)																	
Temperature coefficients of Pmax	-0.41%/°C																	
Temperature coefficients of Voc	-0.30%/°C																	
Temperature coefficients of Isc	0.05%/°C																	
Nominal operating cell temperature (NOCT)	45±2°C																	

STC: ☀ Irradiance 1000W/m²

Module Temperature 25°C

AM=1.5

NOCT: ☀ Irradiance 800W/m²

Module Temperature 20°C

AM=1.5

Wind Speed 1m/s

* Power measurement tolerance: ± 3%