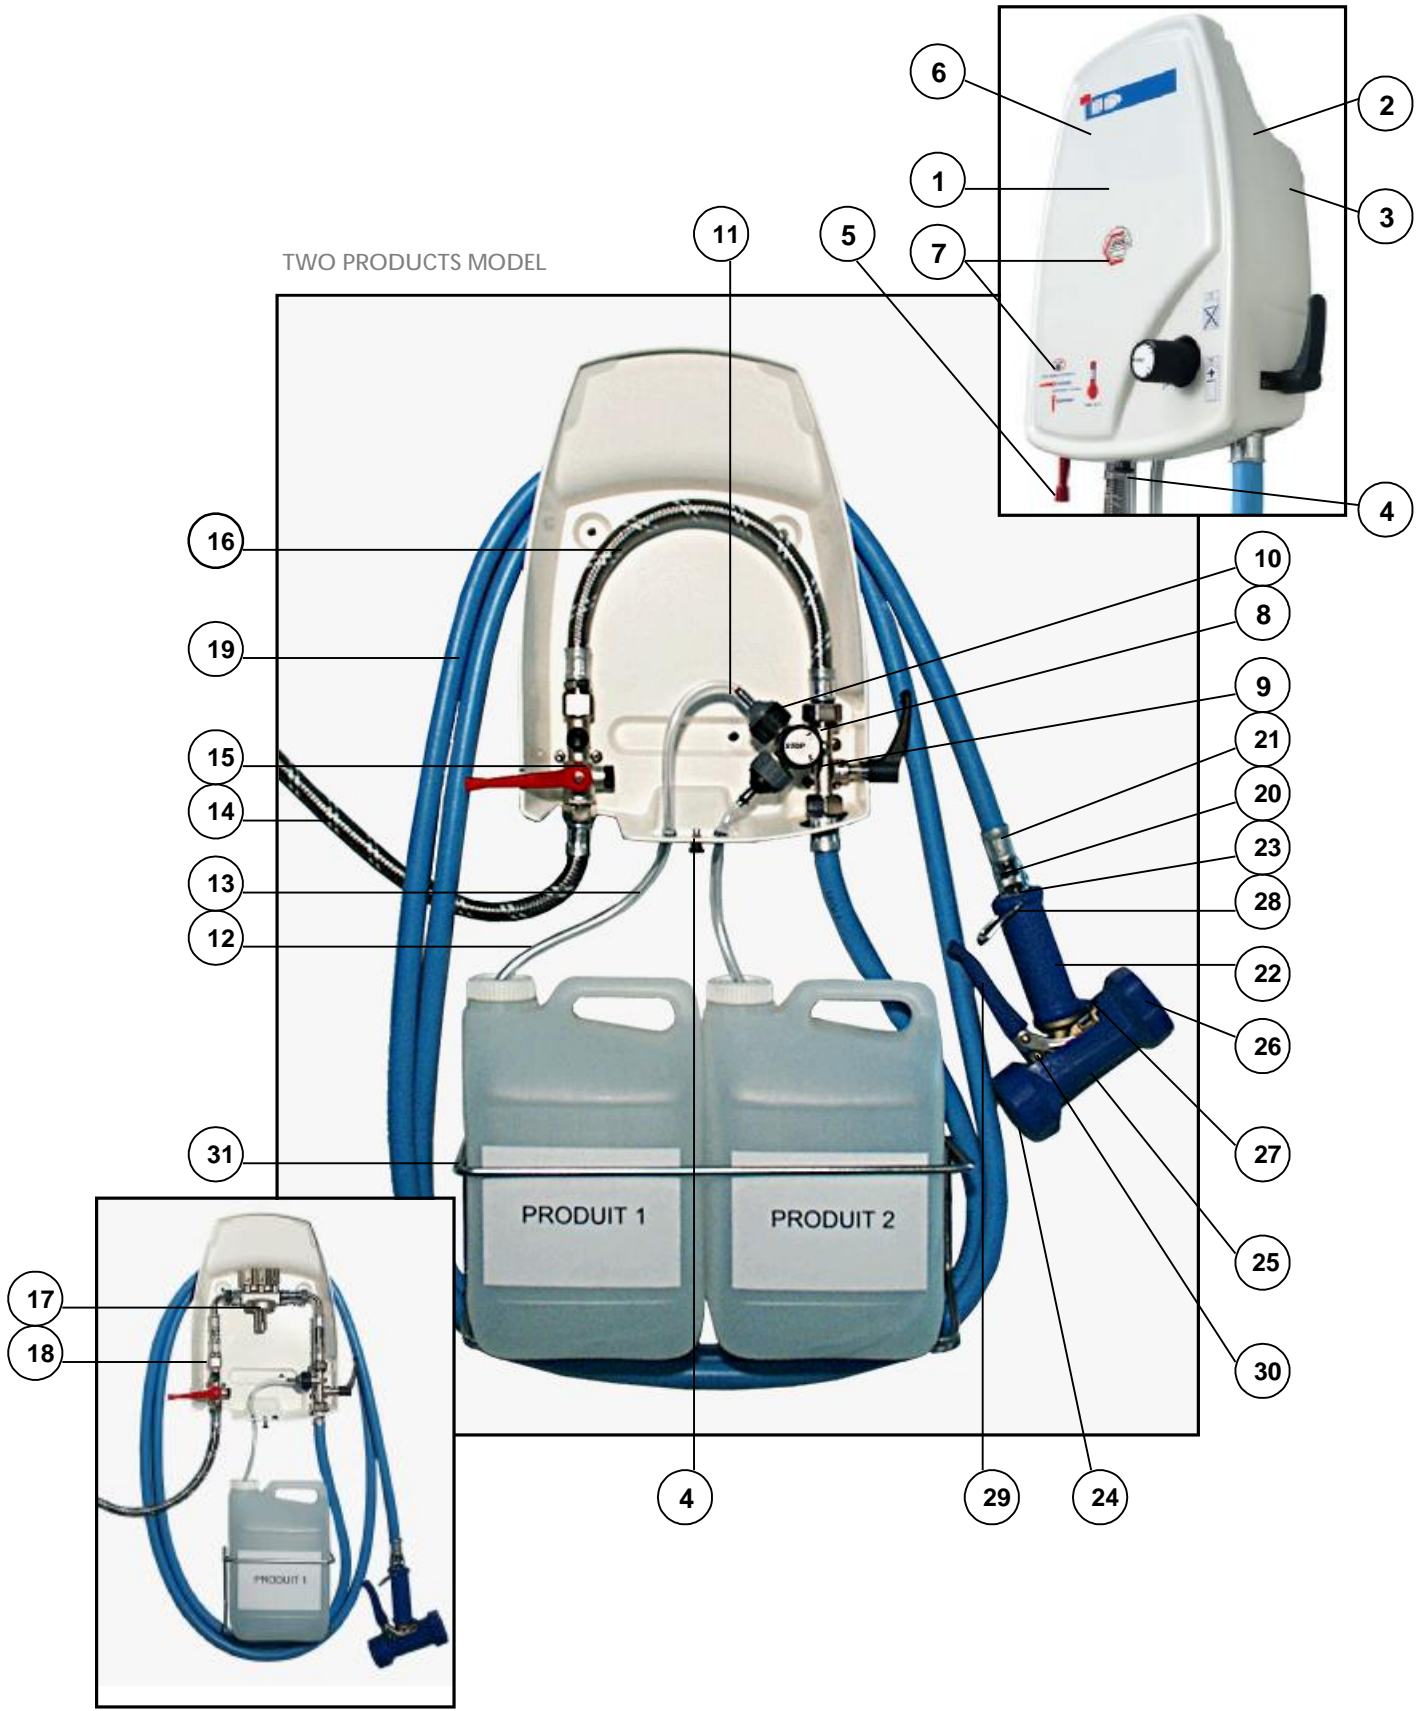

HACCP SPRAY SYSTEM

HACCP SPRAY SYSTEM



UNIC SELLING POINTS

UNIC SELLING POINTS



TWO PRODUCTS MODEL

1 PRODUCT MODEL WITH BA TRIPLE CHECK VALVE

① THERMOFORMED PVC SHELL



- Ergonomical
- Attractive
- Sturdy structure
- HACCP design



- Integrated discharge hose support rack ②
- Double strength ③
- high impact resistance
- Integrated wall spacers HACCP



- Smooth surface
- Easy to clean and dust
- No sharp edges
- Safe handling



- A front cover easy to open / close

Ø One firm clip on the top



- Ball valve with double check valve integrated
- Safe smooth and well protected



④

⑥ CUSTOM SILK SCREEN COVER

STANDARD COVER



- Universal pictograms ⑦
- Clear instructions
- High definition silk screening



Company logo

Customised legal and operational pictograms and safety warning



- Special colour : available on request

8 THE VENTURI

ONE PRODUCT VENTURI



- 3 ancre points
- Very smooth lever action
- Temperature up to 80°C

TWO PRODUCT VENTURI



- Safety tracability

9 VENTURI INSERT



- PP with glass fibre
- Temperature up to 80°C
- Compatible with most chemicals
- Prevention of lime deposits
- Very easy to change in seconds

10 CHEMICAL INLET CHECK VALVE

- EPDM membrane (standard)



- VITON membrane (optional)



- Body PP
- High chemical compatibility
- O'ring and washer for proper fit and seal

11 METERING TIP



- Bag of 14 coloured coded tips

	PINK	0,50 %		LIGHT BROWN	4,90 %
	PURPLE	0,80 %		BLUE	5,50 %
	TURQUOISE	1,50 %		WHITE	6,80 %
	YELLOW	1,80 %		RED	8,60 %
	DARK BROWN	2,50 %		BEIGE	10,50 %
	ORANGE	2,70 %		BLACK	10,80 %
	GREEN	3,20 %		GREY	10,90 %

TEST CONDITIONS

- Product : water - Viscosity : 1 cP
- Blue rubber gun
- Dynamic pressure : 2,5 bar
- Rinse flow : 12,25 L / mn
- Hose length : 20 meters
- wash flow : 8,7 L / mn

12 CHEMICAL INLET LINE



- PVC cristal
- Foot strainer with stainless steel weight
- Optimum suction mesh



- Marqued chemical inlet tube : product 1 and 2 ¹³

14 MAINS WATER CONNECTION KIT



- Stainless steel braider hose
- 10 years warranty
- Rated up to 110°C - 18 bar
- Chock absorber against water hammer effects

BALL VALVE AND FLEXIBLE S/S HOSE



- Ball valve with integrated double check valve
- NF patent (15)
- Safety caps against frost
- Connecting points for water pressure
- LEFRANC-BOSI design and patent (16)
- Flexible s/s hose rated up to 110°C – 18 bar
- Chock absorber against water hammer effects

(17) TRIPLE CHECK VALVE



- Backflow prevention device
- Complies with E.U. norme 1717
- Approved DVGW certification
- 3 connecting and testing points standard



- A flexible design for easy access to testing cocks

(18)

(19) DESCHARGE HOSE



- Food quality
- Temperature : 70 °
- Pressure : 20 bar
- Safety factor : 3
- Fitted with female quick (20)



- Tracability
- Crimped connectors

(21)

(22) SPRAY GUN – INDUSTRIAL STANDARD – 7 U.S.P.

- Gun – brass body
- Fully protected with food quality rubber
- Temperature up to 80°C Pressure : 25 bar (23)
- Male quick connector

