

SKY STAND



FEATURES



- ◀ OLED Light panels are a human-friendly light source with no glare, no heat, no UV and no blue light risks which can harm eye-sight.
- ◀ OLED Light has spectral distributions closest to those of natural light.
- ◀ OLED panels are thin and lightweight.

SPECIFICATIONS


INDEX		DATA
DIMENSION	mm	W322 X L279 X H384
WEIGHT	Kg	1.1kg
INPUT SPECIFICATIONS	V, A	DC 12V, > 3A
POWER CONSUMPTION	W	≤ 11
COLOR TEMPERATURE	K	2,700
LUMINOUS FLUX	lm	250->375->500
EFFICIENCY	lm/w	60
COLOR RENDERING INDEX	Ra	> 87
STORAGE CONDITION	°C, %	0~40°C, < 70% RH
OPERATING CONDITION	°C, %	0~40°C, < 70% RH
CERTIFICATION	-	KC, CE

SKY STAND

PHOTOMETRIC DATA

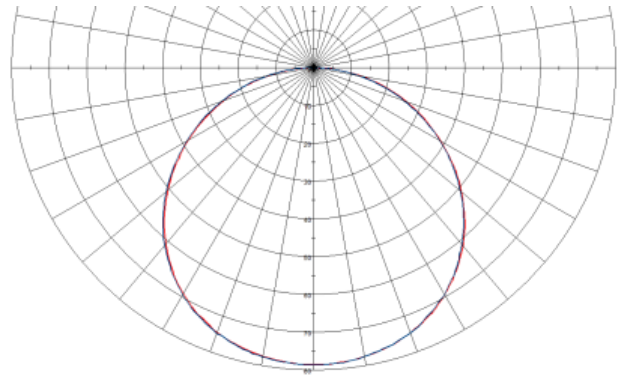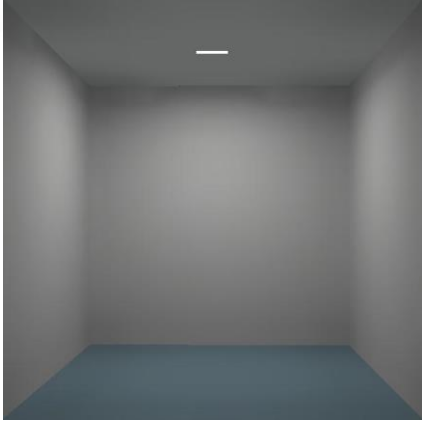

ADAPTOR

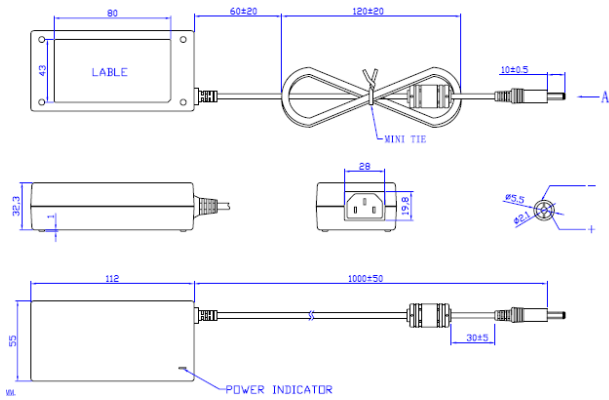

INDEX		DATA
DIMENSION	mm	W55 X L112 X H32
OUTPUT SPECIFICATIONS	V, A	DC 12V, 3.3A

DRAWING DATA

