

# LL161RR1-64P1-OY1

## Technical data sheet

**Supplier : LG Display, Ltd.**

**Issued date : Jan. 04, 2016**

**Product : OLED panel**

	Development Team	Production Team	QA Team
Approval			
	2016.01.04		

## Issue & revision history

Version	Date	Description
0	2016/01/04	Issued (Tentative)

# Rigid Bar Type OLED Panel (LL161RR1-64P1-OY1)

## 1. Ordering Information

Model	Description	Efficacy	CCT
LL161RR1-64P1-OY1	Panel with flexible PCB	55lm/W	4000K

## 2. General Conditions

Parameter	Temperature	Humidity	Remark
Storage condition	0°C~40°C	< 70% RH	
Transport condition	-20°C~60°C	< 85% RH	Not over 170hrs
Operating condition	0°C~40°C	< 70% RH	

## 3. Maximum Ratings

Parameter	Sym	Unit	Max.	Condition
DC Forward Voltage	$V_F$	V	7.0	$T_A=25^\circ\text{C}$
DC Forward Current	$I_F$	mA	800	$T_A=25^\circ\text{C}$

Disclaimer: Device reliability may be affected if product is operated beyond the given conditions for an extended period of time

## 4. Electrical & Optical Characteristics

Operation @150lm

Parameter		unit	Min.	Typ.	Max.
Electrical data	Forward voltage*	V	5.7	6.0	6.3
	DC forward current (Current density)	mA (mA/cm <sup>2</sup> )		480 (2.97mA/cm <sup>2</sup> )	
	Power consumption	W	2.74	2.88	3.02
Optical data	CCT (integrated)	K	3750	4000	4250
	CRI	Ra	87	90	
	Duv		-0.005		0.005
	Spatial uniformity**	%	80		
	Efficacy	lm/W	48	55	62
	Flux	lm	130	150	170
Lifetime***	LT70, @2.97mA/cm <sup>2</sup>	Hrs.		30000	

\*Voltage is measured after stabilization. Panel under test is regarded as stable if the voltage do not change during 1min interval measurement or total turn on time is over 5min.

\*\* Luminous uniformity calculation formula:  $U = [1 - (L_{max} - L_{min}) / (L_{max} + L_{min})] \times 100\%$







\*\*\* Operating Lifetime is from the beginning of operation until brightness reaches 70% of the initial luminance. (Assumed Operating Condition: 25 °C at typical brightness level)

## 5. Mechanical Dimensions

	Parameter	Sym	Unit	Bare panel
Outer	Length	L	mm	406.0±0.3
	Width	W	mm	50.0±0.3
	Thickness*	T	mm	0.88±0.1
	Shape			Rectangle
	Weight		g	<45
Inner	Encapsulation area		mm <sup>2</sup>	403.0x49.4
	Luminance area		mm <sup>2</sup>	394.2x41.0

• Thickness with out-coupling film

# 6. Drawings

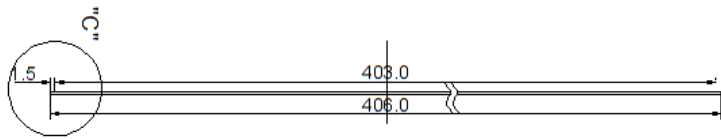
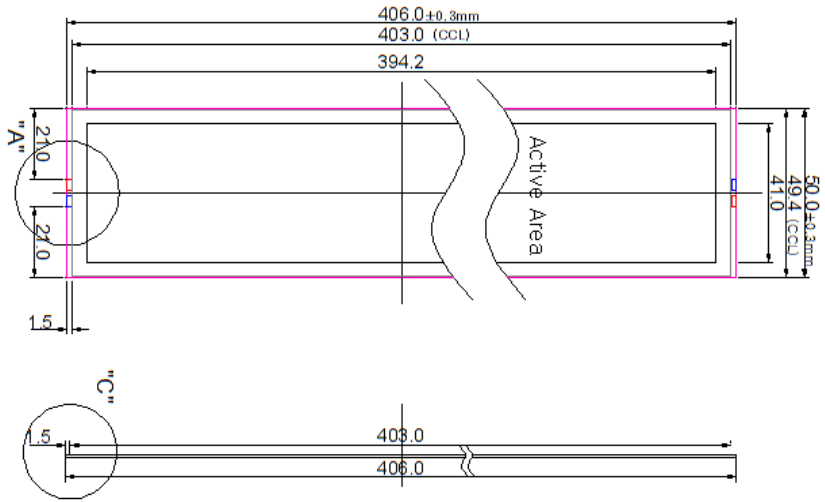


\* Note  
1. Tolerance :  $\pm 0.3 \text{ mm}$

REV	DESCRIPTION	DATE	BY	APP
	LG Chem			
PRODUCTION	APPROVAL	DATE	BY	APP
SCALE	1:1	APPR		
UNIT	MM	CHECK		
DESIGNER	EE, JIN BOK	2015. 7. 2	REV	1
			REV	2
			REV	3
			REV	4
			REV	5
			REV	6
			REV	7
			REV	8
			REV	9
			REV	10
			REV	11
			REV	12
			REV	13
			REV	14
			REV	15
			REV	16
			REV	17
			REV	18
			REV	19
			REV	20
			REV	21
			REV	22
			REV	23
			REV	24
			REV	25
			REV	26
			REV	27
			REV	28
			REV	29
			REV	30
			REV	31
			REV	32
			REV	33
			REV	34
			REV	35
			REV	36
			REV	37
			REV	38
			REV	39
			REV	40
			REV	41
			REV	42
			REV	43
			REV	44
			REV	45
			REV	46
			REV	47
			REV	48
			REV	49
			REV	50
			REV	51
			REV	52
			REV	53
			REV	54
			REV	55
			REV	56
			REV	57
			REV	58
			REV	59
			REV	60
			REV	61
			REV	62
			REV	63
			REV	64
			REV	65
			REV	66
			REV	67
			REV	68
			REV	69
			REV	70
			REV	71
			REV	72
			REV	73
			REV	74
			REV	75
			REV	76
			REV	77
			REV	78
			REV	79
			REV	80
			REV	81
			REV	82
			REV	83
			REV	84
			REV	85
			REV	86
			REV	87
			REV	88
			REV	89
			REV	90
			REV	91
			REV	92
			REV	93
			REV	94
			REV	95
			REV	96
			REV	97
			REV	98
			REV	99
			REV	100

DWG NO.

## 7. Appearance Criteria

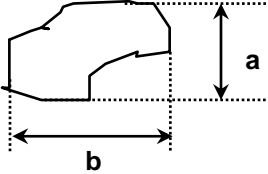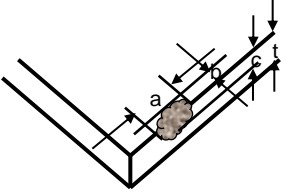Items	Criteria								
Dark spot	Defects are judged by the size of each item in the active area and based on the criteria below								
Particle	<table border="1" data-bbox="489 411 1158 604"> <thead> <tr> <th>Size(mm)</th> <th>Acceptable number</th> </tr> </thead> <tbody> <tr> <td><math>D \leq 0.5</math></td> <td>Not counted</td> </tr> <tr> <td><math>0.5 &lt; D \leq 0.8</math></td> <td>Not over 5</td> </tr> <tr> <td><math>0.8 &lt; D</math></td> <td>Not allowed</td> </tr> </tbody> </table>	Size(mm)	Acceptable number	$D \leq 0.5$	Not counted	$0.5 < D \leq 0.8$	Not over 5	$0.8 < D$	Not allowed
Size(mm)	Acceptable number								
$D \leq 0.5$	Not counted								
$0.5 < D \leq 0.8$	Not over 5								
$0.8 < D$	Not allowed								
Pinhole									
Dent on surface	<p data-bbox="476 625 671 653">Note : <math>D = (a+b)/2</math></p> 								
Bubble									
Scratch or line on emitting surface	<p data-bbox="459 915 1153 971">Defects are judged by the size of each item in the active area and based on the criteria below</p> <table border="1" data-bbox="489 1000 1158 1174"> <thead> <tr> <th>Size(mm)</th> <th>Acceptable number</th> </tr> </thead> <tbody> <tr> <td>Width <math>\leq 0.3</math></td> <td>Not counted</td> </tr> <tr> <td><math>0.3 &lt; \text{Width or } 10 &lt; \text{Length}</math></td> <td>Not allowed in active area</td> </tr> </tbody> </table>	Size(mm)	Acceptable number	Width $\leq 0.3$	Not counted	$0.3 < \text{Width or } 10 < \text{Length}$	Not allowed in active area		
Size(mm)	Acceptable number								
Width $\leq 0.3$	Not counted								
$0.3 < \text{Width or } 10 < \text{Length}$	Not allowed in active area								
Chip	<p data-bbox="459 1267 953 1294">Defects are judged based on the criteria below</p> <ul data-bbox="494 1319 1093 1373" style="list-style-type: none"> <li>* Corner chip : Not allowed if <math>a &gt; 2\text{mm}</math> or <math>b &gt; 2\text{mm}</math></li> <li>* Edge chip : Not allowed if <math>a &gt; 10\text{mm}</math> or <math>b &gt; 2\text{mm}</math> or <math>c \geq t</math></li> </ul>  <p data-bbox="459 1601 1062 1628">Note : <math>t =</math> Thickness of glass (Substrate or Encapsulation)</p>								

## 8. Reliability

- Evaluation criteria : Luminance change within +/- 10% of initial value

Items	Condition
High temperature/humidity operation	60°C, 90% RH / IF=Typ.mA,96Hrs
Thermal shock	-45°C,15min ↔ 85°C,15min 1cycle ,200cycles
High temperature /humidity storage	+85°C, 85% / 500Hrs
Life time	Room Temp. / IF=Typ.mA, 2,000Hrs

## 9. Guideline to OLED Handling

### A. Handling and Safety

1. Unpack packing box with care. Remove packing trays gently and carefully from packing box.
2. During unloading and handling, gloves are required to prevent finger cuts or possible shocks. Gloves are also required to avoid fingerprints being left on the glass, and to keep moisture from causing corrosion to the metal traces.
3. Handle panels with caution. Mechanical stress such as shocks and pressures on the panel surface (active area, encapsulation glass cavity area) must be avoided to prevent cracking of the glass, delamination, scratching of the film, and internal structure damage. Do not press or drop the panel.
4. During unloading and handling, panels should always be held from the side. Avoid direct contact with metal contact pads or connector traces.
5. Protect the panel surface from scratches. Avoid direct contact on panel surface and do not stack panels on top of each other.
6. Protect the corners and edges during handling, assembly or installation to prevent chipping or breakage of glass.
7. Avoid contact with chemicals such as solvents.
8. Contact with water must be avoided to prevent damage of films and corrosion of metal traces. Water drops must be wiped immediately.
9. To remove particle/foreign materials and surface stains, gently wipe the surface of the panel with non-abrasive cloth.
10. In case of breakage, avoid direct contact with bare hands. Do not swallow particles, chips, or materials.
11. For interconnections, spring contacts are recommended. Soldering and other interconnecting technologies which apply heat to the panel may cause damage, and are therefore not recommended.
12. Do not hold the panel on the surface . Hold the panel from the edge.
13. In case of connecting multiple panels, series connection is highly recommended. Panel to panel uniformity problem can occur by parallel connection.

### B. Storage and Operation

1. Store and operate OLED panels within the ranges specified in the product specifications on page 1. Recommended temperature is at 25°C; Recommended relative humidity is below 60% (RH). (High temperature and humidity can cause film degradation, bubble generation, and film delamination)
2. Store panels as delivered from LG Chem.

### C. Disposition


Dispose OLED materials/panels/modules in accordance with each region's environmental laws and regulations. If necessary, consult qualified agencies on industrial waste treatment.



## Appendix

### A. Wiring connection guide

1. Each (+),(-) electrode of both ends of panel should be connected together to get appropriate uniformity.

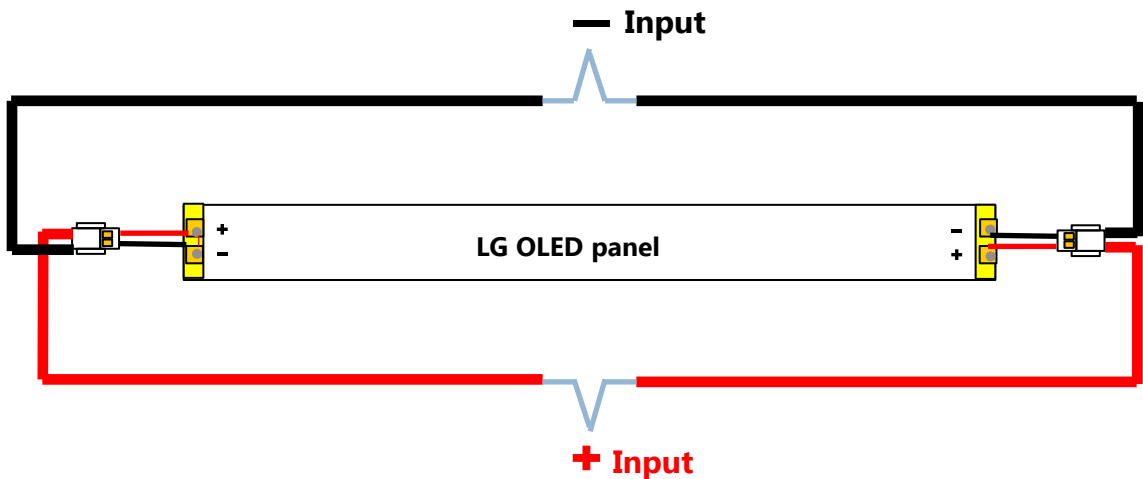

### B. Soldering guide

1. Please, follow the recommendation as below.
  - Max temp : 400°C
  - Duration time : up to 2 sec