


This guide applies to all configured LogTag recorders, including USB.

Step
1

Activate the recorder by pressing the START-button for 3 seconds. The two lights will flash, which means the recorder is activated.

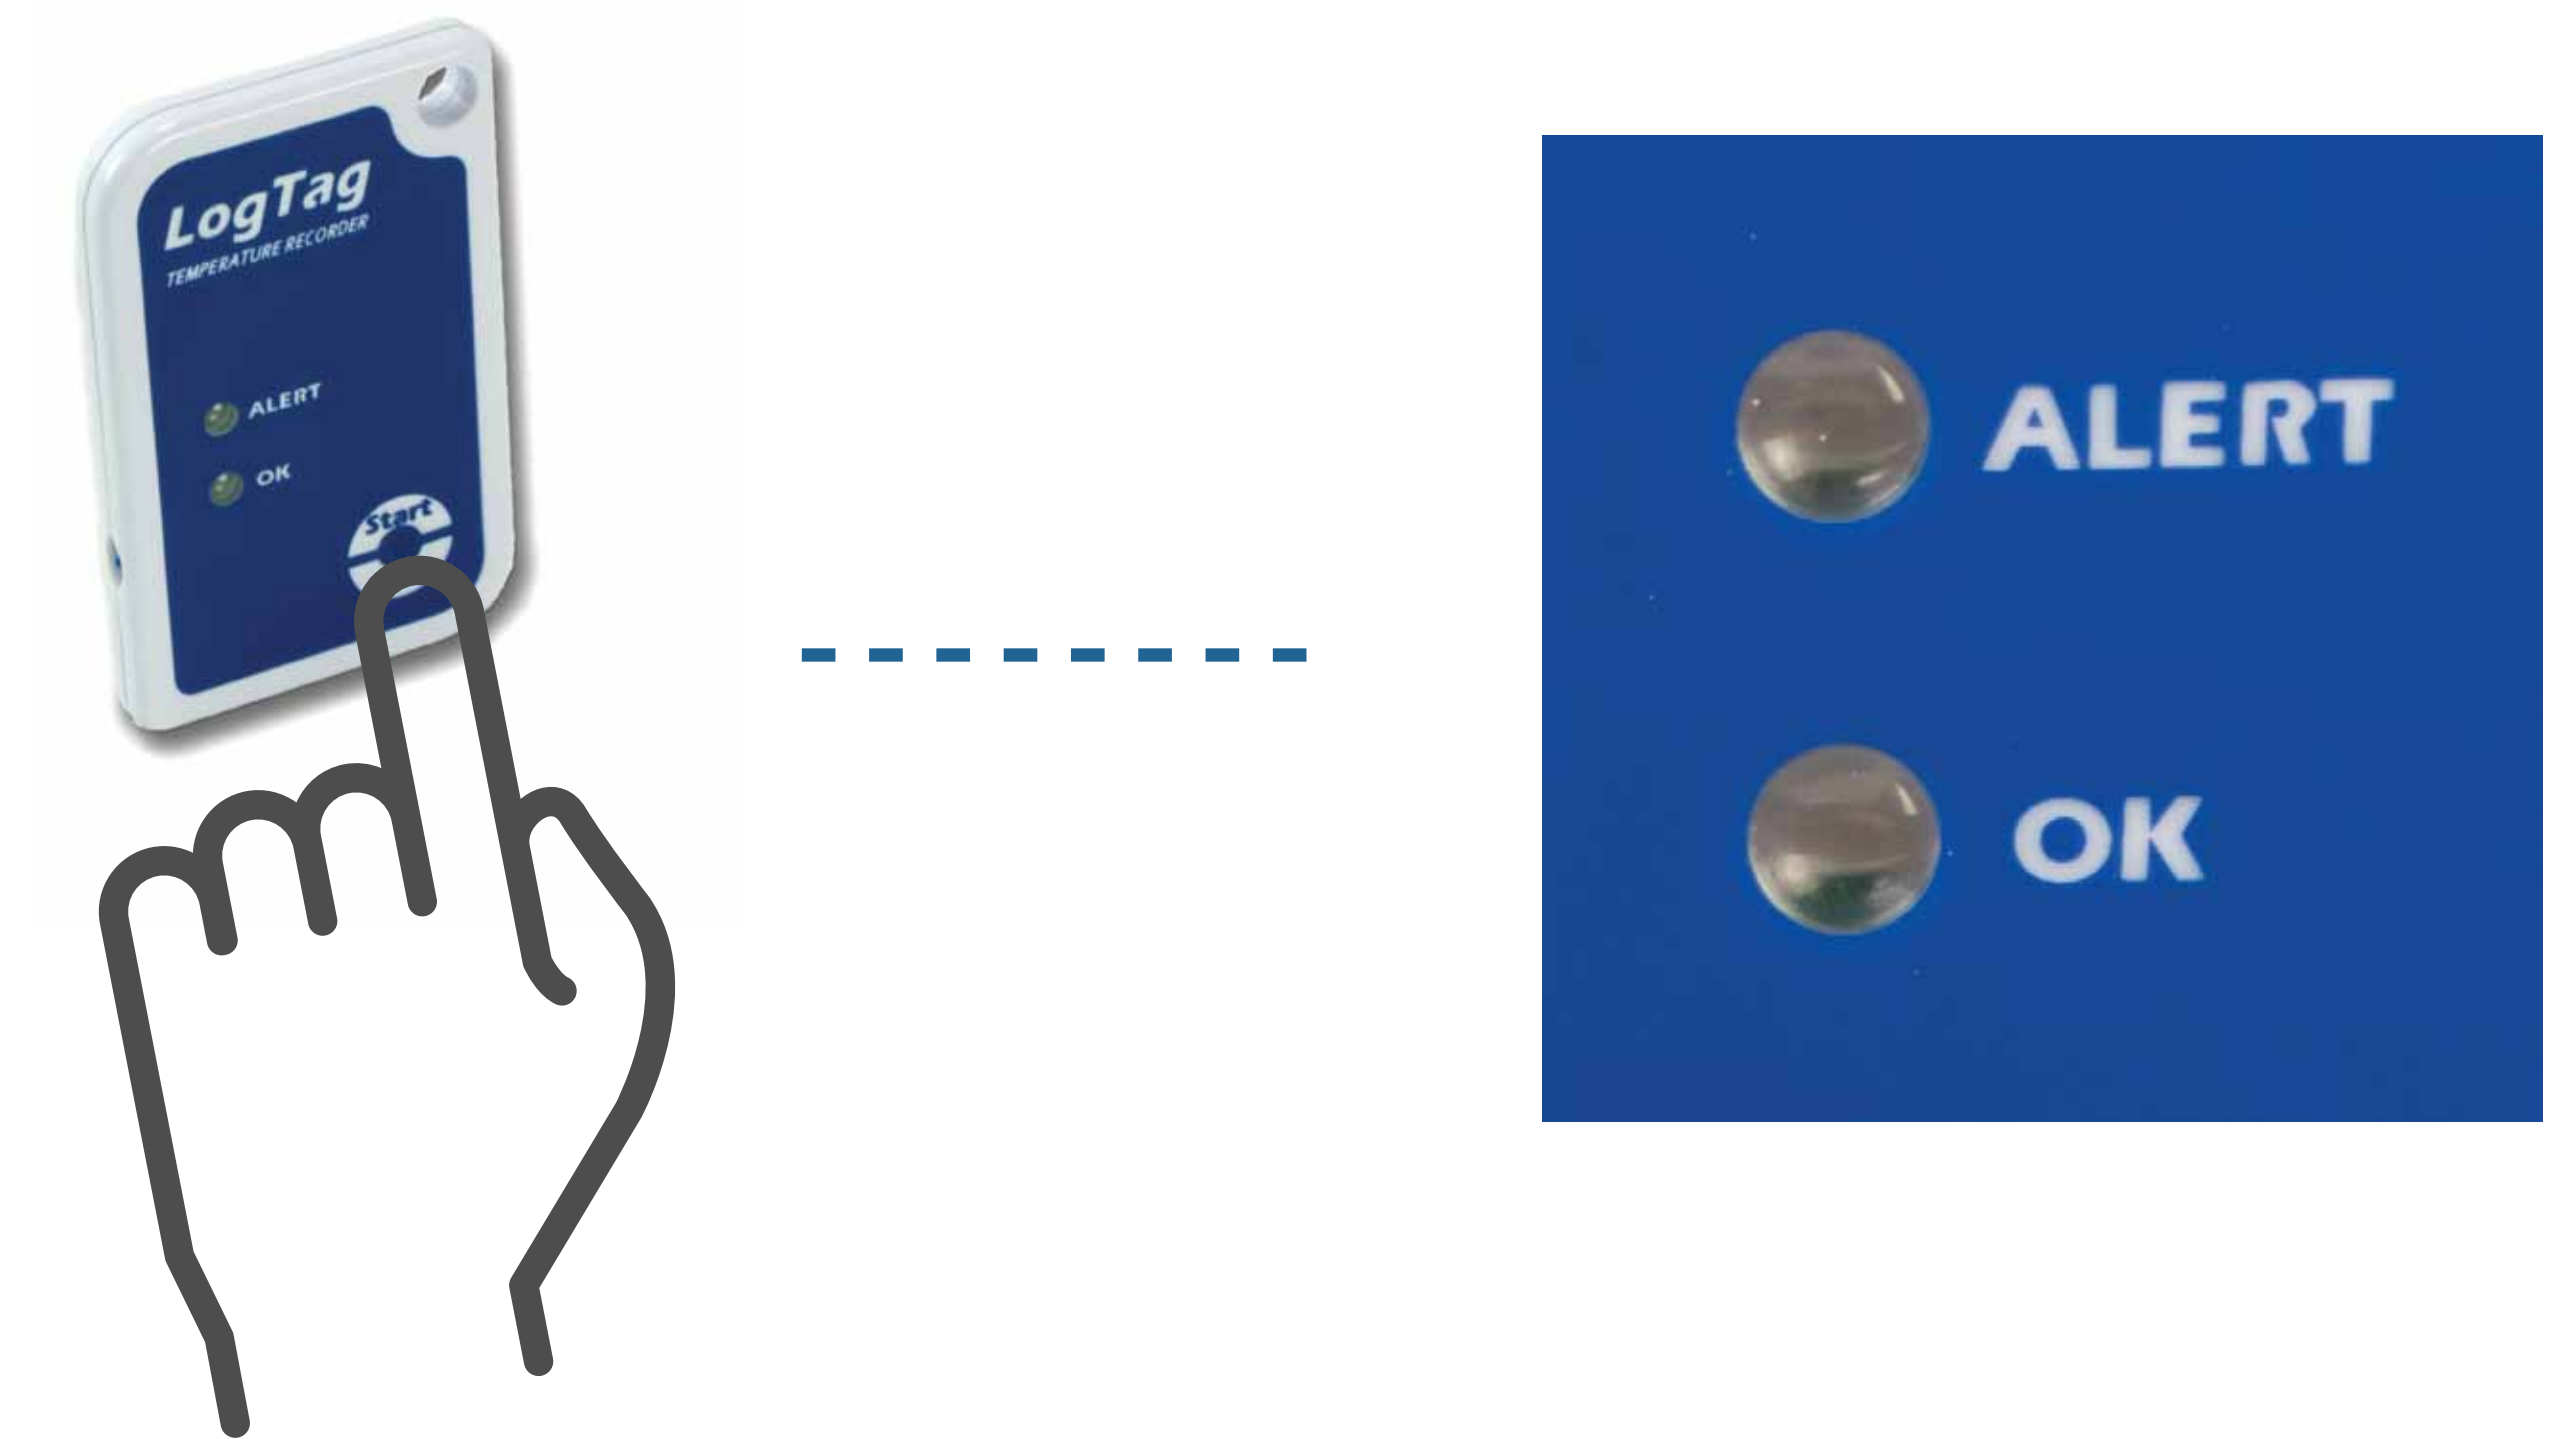

Step
2

Place the recorder on the spot you would like to monitor (for example a box).

Be aware: don't cover the sensor for a better result.

