

43" IP65 High Brightness Monitor





- Comprehensive IP65 protection for applications under harsh circumstances, including water- and dustproof
- 1000+ cd/m² brightness for increased visibility
- Reinforced front glass, anti-glare surface treatment (chemically etched)
- A+ quality LED backlight panels
- All-in-One cable (HDMI / DC-In)
- VESA 400 mounting
- 2 years guarantee

This is the perfect device for industrial and outdoor applications in harsh environments, while maintaining a modern sleek look with its flat edge-to-edge glass front panels.

The monitor is equipped with LED backlights able to increase the brightness to at least 1000 cd/m². It has comprehensive IP65 protection, making it completely water- and dustproof. Included is an All-in-one cable solution, with HDMI and a 24V DC-In.

On the back of the device, there are two buttons for adjusting brightness (with 5 levels available), as well as a VESA 400 solid fixation.

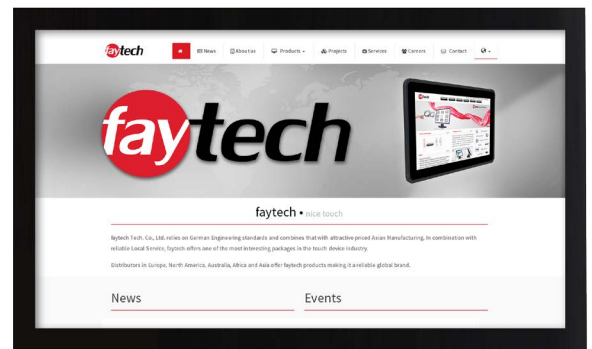

Product name	43" IP65 High Brightness Monitor
Article number	FT430MIP65HBOB



LCD Panel	
Screen diagonal (Inch/cm)	42.5/107.95
Display active Area (cm)	94.09×52.93
Reflection type (glare / anti glare)	Anti Glare
Aspect ratio	16:9
Physical resolution	1920×1080
Maximum showable resolution	1920×1200
Colours displayed	16.7M
Brightness (cd/m ²)	1000+
Contrast	3000:1
Typical reaction time Tr/ Tf (ms)	8/8
Visual Angle horizontal/vertical (°)	178/178
Backlight / Backlight Lifetime (hours)	LED / 50,000

External Connectors	
1× HDMI	
1x DC-IN 24V	

Operation / Mechanical	
Operating Temperature (°C)	-10 ~ +60
Humidity Range (RH)	10% - 90%
Net weight (kg)	-
Gross weight (kg)	-
Housing material	Aluminum
Housing (cm) L × W × H	103.10 × 61.95 × 6.51
Mounting	VESA 400

Power	
Power Supply	100-240V ACDC active switching; 24V DC-Out
Working Power (V)	24
Power Consumption (W)	96
Stand-By Consumption (W)	<1

Included in the Delivery	
Power Supply (see Power section)	
Driver DVD	
All in one cable (HDMI / DC-IN)	

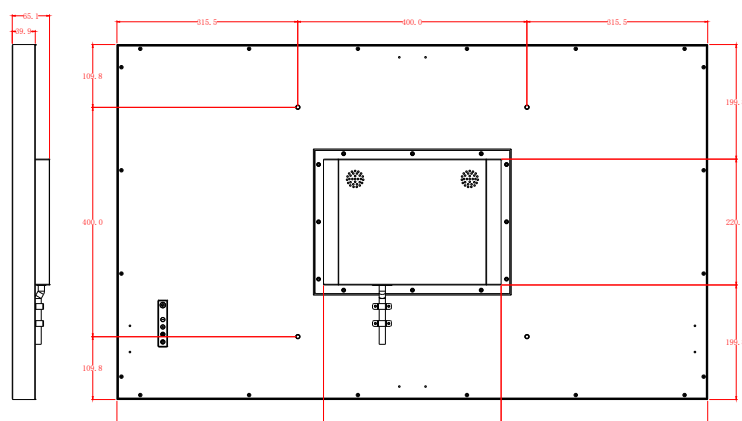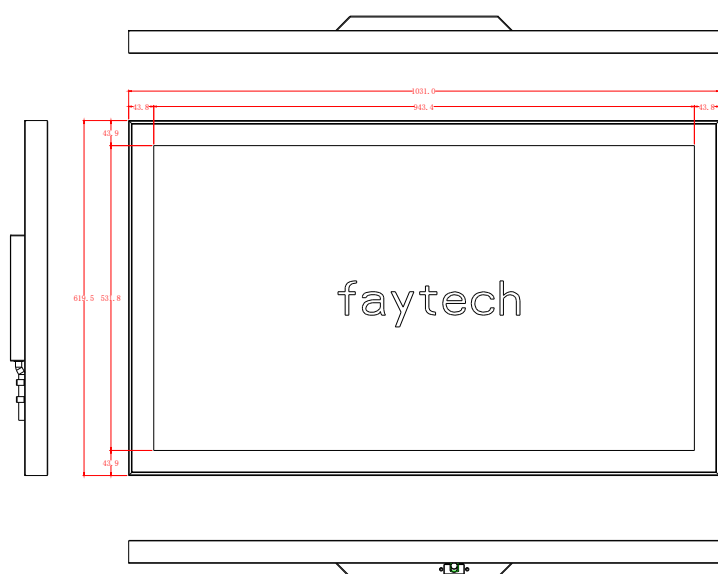

Corporate Headquarters

faytech Tech. Co., Ltd.
Building F., Hongmen Tech. Zone,
Jihua Rd., Shenzhen, China 518129

support@faytech.com
contact@faytech.com
www.faytech.com

China: +86 755 89580612
Germany: +49 551 82098660
USA: +1 646 205 3214