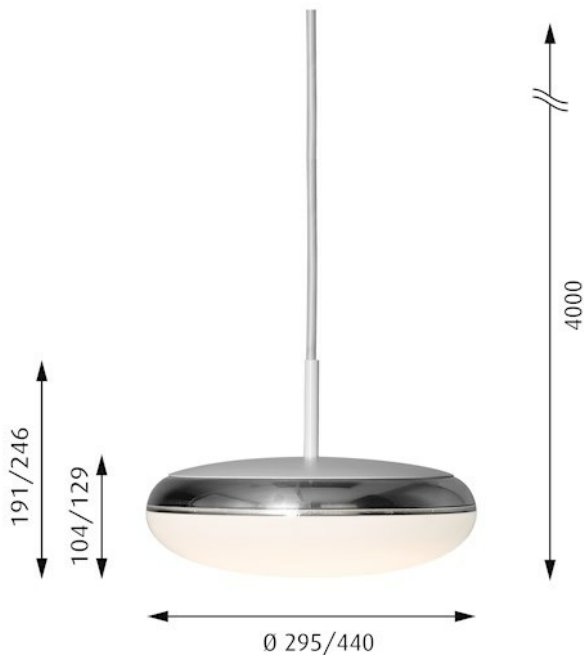

SILVERBACK SUSPENDED



Design:
KiBiSi

Concept:
The fixture emits diffused light. The curved opal diffuser provides soft, pleasant, primarily downward directed room lighting. The metallised semitransparent rear side of the diffuser produces a halo effect and reflects light from the surroundings. The rounded white top completes the curve from the diffuser. The luminaire is suspended simple and elegant from its cord. A white pendant tube in the top of the housing ensures stability and balance in the luminaire.

Finish:
Ø 295: Top: ASA white structure. Shade: Opal and alu-metallised. Ø 440: Top: Aluminium powder coated white. Shade: Opal and alu-metallised.

Material:

Weight:
Min: 2.2 kg Max: 5.2 kg

Class:
Protection class IP20, Insulation class I.

Info notes:
For Switch-Dim, contact Louis Poulsen. For LED replacement kit please do contact Louis Poulsen. The innovation of the LED technology is in constant development. The specifications mentioned are based on present technology. Please find updated info on products on our website www.louispoulsen.com.

Specification notes:
LED power consumption measured as system effect.

Ø 295: Fixture body: Die cast aluminium powder coated white. Top: Injection moulded plastic white structure. Shade: Opal PMMA and semi-metallised PC. Ø 440: Fixture body: Die-stamped steel sheet, powder coated, white. Top: Die-stamped aluminium, powder coated white. Shade: Opal PMMA and semi-metallised PC.

Mounting:

Suspension type: 5x0.75mm² cord. Ceiling rose: Yes. Cord length 4m.

Results (4)



DIMENSIONS	CCT/WATT/ LUMEN	LIGHT SOURCE	FINISH	MOUNTING	LIGHTING CONTROL	EFFICACY	ORDER-NO.
Ø 295	3000K 9.8 863	10WLED 3000K	OPAL	SUSPENDEDED	DIM 1-10V	88	5741096996 >
Ø 295	3000K 9.8 863	10WLED 3000K	OPAL	SUSPENDEDED	DALI	88	5741097005 >
Ø 440	3000K 33.0 2401	33WLED 3000K	OPAL	SUSPENDEDED	DIM 1-10V	73	5741097636 >
Ø 440	3000K 33.0 2401	33WLED 3000K	OPAL	SUSPENDEDED	DALI	73	5741097652 >

SPAREPART

PRODUCT NAME:

ORDERING NUMBER:

SILVERBACK 295 SHADE PMMA

5743157040

SILVERBACK 440 SHADE PMMA

5743168712