


FRAME HANGING DOUBLE 44 mm

ITEMS DELIVERED

- 4 profile pieces (if you ordered hangers: 3 profiles without slot, 1 profile with outer slot)
- 4 corner locks
- 1 allen key
- (ceiling hangers)
- (textile print with rubber lip all around)


STEP 1



Connect corner

Take a profile piece without slot and put the locks in the according rail in the profile. Put another profile piece without slot on the lock. Connect 3 profile pieces without slot in this way.

STEP 2

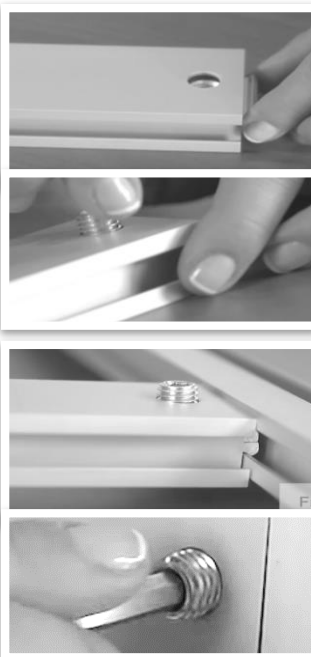

For frames ≥ 2 m: insert stabilizer



This could also be done after the frame mounting, but it is easier if only 3 profiles are connected. Prepare the stabilizers by inserting the locks in the stabilizer, so the holes of the lock and the stabilizer are above each other.

Now put the stabilizer in the frame while the lock is inserted in the inner slot of the profile. Then tighten the screws of the locks.

INSTRUCTIONS

STEP 3

Attach ceiling hanger (if ordered)




Drill the ceiling hangers slightly in the slot nut. Now slide the ceiling hanger in the outer slot of the last profile and tighten it.

For adjustable ceiling hangers: Screw the piece for the ceiling to the ceiling. Pull the cable through the matching piece so the bullet lies in it. Then screw the matching piece to the ceiling piece. Put the other side of the cable through the hanger in the profile and adapt the length of the cable as you need it.

STEP 4


Connect all profiles and corners



Equip the last profile piece with the 2 left locks and put it on the 3 already mounted profiles.

STEP 5


Tighten all locks and screws



Put the frame on an even ground and tighten all screws of the locks with the allen key.

STEP 6

Insert textile



Insert the textile with the rubber lip into the according notch of the frame. Make sure that you hold the rubber lip right, since otherwise the textile will not fit in the frame: Fold the rubber lip slightly inwards (90°) and put it into the notch (see image).

Note regarding the ceiling mounting:

Depending on the ceiling conditions, different screws and dowels are necessary. Please check before mounting which mounting materials are suitable for you ceiling.