



lockout-tagout-shop.com
providing safety

LOCKOUT-TAGOUT-SHOP.COM | INFO@LOCKOUT-TAGOUT-SHOP.COM | VAN 'T HOFFSTRAAT 31 | 2665 JL BLEISWIJK | THE NETHERLANDS



USP
A USP COMPANY

What is Lockout/Tagout?

Lockout / Tagout is a planned safety procedure which involves turning off the energy supply of industrial machinery and equipment whilst maintenance work or repairs are being carried out. This procedure protects workers from the risks posed by live machinery or electricity.

LO/TO SAVES LIVES!



Why work with Brady?

Brady is the global leader in Lockout/Tagout solutions.

Brady was the first to respond to the new OSHA legislation in the U.S. in 1990, and has maintained its position as a leading Lockout solutions provider ever since. Today, Brady offers a comprehensive package for Lockout/Tagout compliance.

Increasing demand for advanced safety solutions in Europe and MEA countries has driven our R&D as well as know-how to become the best-in-class LO/TO complete solution provider.



CONTENT

What is Lockout/Tagout?.....	2
Why implement Lockout/Tagout program?	3
Brady's Complete LO/TO Solution	3
Respecting Legal Requirements.....	4
Effective Control of Hazardous Energy.....	5
Hazardous Energies where LO/TO is ideal means of control	5
Effective Lockout Program in 4 Steps.....	6-7
LO/TO Devices & Tools Overview.....	8

Padlocks

Introduction & Overview.....	9
Safety Padlocks	10-11
Aluminium	12
Steel.....	12-13
Brass.....	13-14
Labels for Padlocks.....	15

Mechanical Risk

Universal Valve Lockouts.....	16
Ball Valves Lockouts	17
Gate Valves Lockouts.....	18-20
Butterfly Valves Lockouts	21
Gas and Airline Lockouts.....	22

Electrical Risk

Circuit Breaker Lockouts.....	23-24
Plug Lockouts.....	25
Push Button, Switch and Fuse Lockouts.....	26
Hasps	27-28
Lockout Kits.....	29-31
Lockout Pouches & Bags	32
Lockout Stations & Boards.....	33
Lock Boxes & Padlock Centres.....	34-36
Tags	37-39
Tag Accessories.....	39-40
Custom Tags.....	40
Brady Signs and Label Printers	41-43

Why implement a Lockout/Tagout program?

Reduced accident rates and injury costs

EU Figures show that 10 to 15% of all fatal accidents at work and 15 to 20% of all accidents are connected with maintenance. Common injuries include fractures, lacerations, amputations, burns and shocks. Due to the serious nature of many LO/TO accidents, injury-related costs can be exorbitant.



Less downtime, higher productivity

A well-organised LO/TO program that includes clearly labelled energy sources, easy-to-follow procedures, and readily accessible lockout tools can greatly speed up maintenance and servicing activities. Workers can avoid time-consuming tasks such as tracing pipelines and electrical circuits in order to verify the appropriate energy control points. As a result, maintenance work is completed more efficiently, downtime is reduced and machinery is kept running at peak performance levels.



Reduced indirect costs

Accidents can have a significant impact on work scheduling and productivity at the affected job site. The unexpected start up of equipment can also cause extensive damage to the machinery itself, adding the expense of equipment repairs and replacement to the total cost involved.



Best Safety Practice

Lockout / Tagout has become globally recognised as Best Safety Practice for many industries and is a legal requirement in the US.



Brady's Complete LO/TO Solution

Complete attitude to effective energy control via audit, identification of energy points, selection and purchasing of proper devices, elaboration of instructions, training and implementation.



* Available only in some EU countries.

Respecting Legal Requirements

EUROPE

The **EU Guidelines 89/655** specify the minimum requirements concerning safety and health while using equipment. Paragraph 2.14 lays down that “every piece of equipment must be fitted with clearly visible devices with which it can be separated from every energy source.

EN 1037 norm related to the equipment’s safety defines the measures regarding the energy isolation of machinery and the power dissipation to prevent hazardous equipment re-energising. It assures a safe and secure intervention within a risk-prone area.

European directive **CEE 89/655** outlines the minimum regulations for the safety and protection of employees when servicing industrial equipment.

AUSTRIA:

AschG – ArbeitnehmerInnenschutzgesetz – Federal Act on Occupational Health and Safety

AM-VO – Arbeitsmittelverordnung (Ordinance on Work Equipment and Tools) – Regulation of the Federal Ministry of Commerce and Labour on protection of employees while using work equipment paragraph 1, §17 (1)

FRANCE:

UTE C18-510 (electrical applications): Lockout of apparatus for service and maintenance to lockout equipment is to carry out the necessary procedures to ensure that the equipment is placed and maintained in a safe position; to prevent its activation and label that the isolated equipment must not be operated. The employer must ensure that all safety procedures are strictly implemented and regularly reviewed by appropriate means. Employees must use all necessary tools to carry out maintenance.

Best practice document developed by INRS (Institut National de Recherche et de Sécurité) in November 2011: ED 6109

Décret 2010-1016 refers to the obligations of the employers for temporary or permanent electrical installations usage

Labour code (article R4215-10) refers to the identification of the conductors

Décret 2010-1018 refers to the prevention of electrical risks in work environment, décret 2010-2118 refers to the operations done on electrical installations.

Labour code (article R 4544-5): the part of the installation on which work (de-energised) is done must be identified and locked.

Arrêté of April 26, 2012: Every operation on electrical equipment must follow the new norm NF C 18-510. Article 1 says that this norm is now included into the French Code of Labour.

GERMANY:

The German legislation specifies this requirement in the “Minimum requirements for use of work equipment” (Betriebssicherheitsverordnung (Ordinance on Industrial Safety and Health), Annex 1. Work equipment controls must be secured against unintentional or unauthorised actuation.

According to the “Minimum requirements for the improvement of the safety and health of workers using work equipment” (Betriebssicherheitsverordnung (Ordinance on Industrial Safety and Health), Annex 2, modification, maintenance or repair operations can only be carried out when the work equipment is shut down. The work equipment and all its moving parts must be protected against accidental start and movement.

ITALY:

The Italian legislation (Direttiva 2001/45/CE del Parlamento europeo e del Consiglio del 27 giugno 2001 che modifica la direttiva 89/655/CEE) concerns the minimum safety and health requirements for the use of work equipment by workers at work.

SWITZERLAND:

- UVG – Federal Law on Accident Insurance
VUV – Regulation on the Prevention of Accidents and Occupational Diseases
title 1, chapter 2, paragraph 1, art. 3; title 1, chapter 3, paragraph 2, art. 30, 31
paragraph 3, art. 37; paragraph 4, art. 43
- EKAS Guideline no. 6512 – Work Equipment

These regulations clearly stipulate that during maintenance, adjusting or cleaning of the equipment, it has to be in non-operative state and appropriate devices have to be used to ensure that, for example, a machine is not accidentally switched on.

SPAIN:

The Spanish directive (REAL DECRETO 1215/1997, de 18 de julio por el que se establecen las disposiciones mínimas de seguridad y salud para la utilización por los trabajadores de los equipos de trabajo. BOE nº 188 07-08-1997) states the minimum safety and health for workers’ use of work equipment.

UK ONLY: BS7671:2008

In the UK the Provision of Work Equipment Regulations – Regulation 19 – Isolation from Sources of Energy states: “Every employer shall ensure, that where appropriate, work equipment is provided with suitable means to isolate it from all its sources of energy. Every employer shall take appropriate measures to ensure that reconnection of any energy source to work equipment does not expose any person using the equipment to any risk to his health or safety”.

USA (OSHA - OCCUPATIONAL SAFETY & HEALTH ADMINISTRATION)

OSHA regulation The Control of Hazardous Energy (Lockout / Tagout) 1910.147 states that it “requires employers to establish a program and utilise procedures for affixing appropriate lockout devices or tagout devices to energy isolating devices and to otherwise disable machines or equipment to prevent unexpected energisation, start up or release of stored energy in order to prevent injury to employees.”



Implemented LOCKOUT/TAGOUT is the law in some EU countries and considered to be best practice in all European countries!

Effective Control of Hazardous Energy

To ensure de-energisation and isolation of all potentially hazardous energies that supply production or facility operating equipment, so that the equipment can be safely serviced or maintained.


Energy Isolating Device – a mechanical device that, when utilised or activated, physically prevents the transmission or release of energy, including

- a manually operated electrical circuit breaker
- a disconnect switch
- a gate / globe / ball / plug / butterfly shut-off valve



Hazardous Energies where LO/TO is the ideal means of control

- Electrical
- Mechanical
- Pneumatic
- Hydraulic
- Liquid & Gaseous Chemicals
- Thermal
- Hot surfaces & substances
- Gravitational
- Overhead objects or equipment that may fall & crush
- Other stored energy
- Flywheel stopped mid-motion, residual electrical that needs to be bled

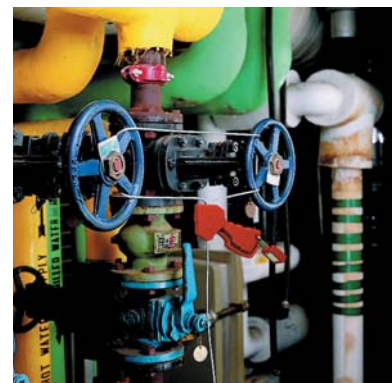

Remember that production, plant or facility equipment commonly have **more than 2 types of energy present.**



Efficient Lockout Program in 4 Steps

Follow the BEST GLOBAL PRACTICE Plan for Creating an Efficient Lockout Program:



1 Create energy control (LO/TO) policy & procedures

The first step is to develop and document a lockout policy that identifies in detail the purpose and scope of the lockout program.

We can help you to create a roadmap for the successful LO/TO program implementation, where you need to execute an audit of all existing potential sources of hazardous energy, create a list, describe procedures and define responsibilities.

TIP: LO/TO Policy should include:

- ✓ Purpose and scope
- ✓ Authorised personnel
- ✓ Enforcement policy
- ✓ Training methods
- ✓ Address special circumstances such as group lockout, shift transfer etc.

Why do you need lockout procedures

- Procedures serve as a check sheet to help employees avoid mistakes and reduce the risk of accidents and injuries.
- Procedures speed lockout activity, which in turn reduces downtime and improves operational productivity.
- Documented machine-specific energy control procedures are required by OSHA.



2 Identify all energy control points

In this step you need to localise and clearly mark all energy control points, including valves, switches, breakers and plugs, with permanently placed labels or tags. Our label makers and Do-It-Yourself Signmarking printing systems together with durable label materials are designed to provide you with reliable and long-lasting identification.



BBP™ 31
SIGN & LABEL PRINTER




GLOBALMARK® 2
INDUSTRIAL LABEL MAKER



POWERMark®
sign and label maker

3 Equip authorised employees with the proper lockout tools and warning devices

Brady offers a comprehensive line of LO/TO devices and tools - Padlocks include safety, non-conductive, brass, Lockouts include Valve, Universal and Circuit breakers, Tags, Labels, Lockout Boxes, Padlock Stations and much more!

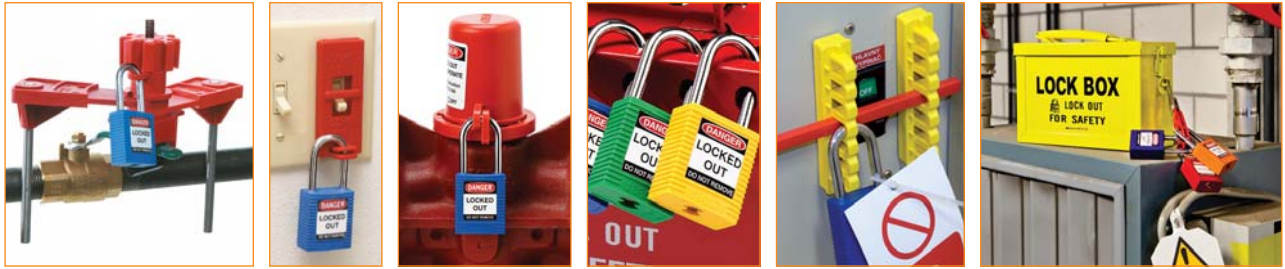

4 Train employees and promote awareness of safe work practices

Brady offers its expertise in training employees and supervisors. We can prepare a fair plan for training sessions, define the required content for a particular audience and train your supervisory staff to be able to perform internal training.



Keep in mind all the people in your facility, recognise 3 groups with different needs of awareness degree:

Authorised Employee	→ A person who locks out or tags out machines or equipment in order to perform servicing or maintenance and identifies that equipment have a source(s) of energy that can cause injury to the employee.	→ Requires the most in-depth training about LO/TO.
Affected Employee	→ An employee whose job requires him/her to operate or use a machine or equipment on which servicing or maintenance is being performed under LO/TO, or whose job requires him/her to work in the area.	→ Needs to be informed about LO/TO and does not attempt to remove lockout devices.
Other Employees	→ Who may encounter lockout being implemented.	→ Need to know the significance of lockout, and to keep away.




Do not forget about different circumstances:


- Shift Changes
- Outside Contractors & Outsourced Maintenance

Brady offers a comprehensive line of LOTO devices and tools...

Universal Valve Lockout

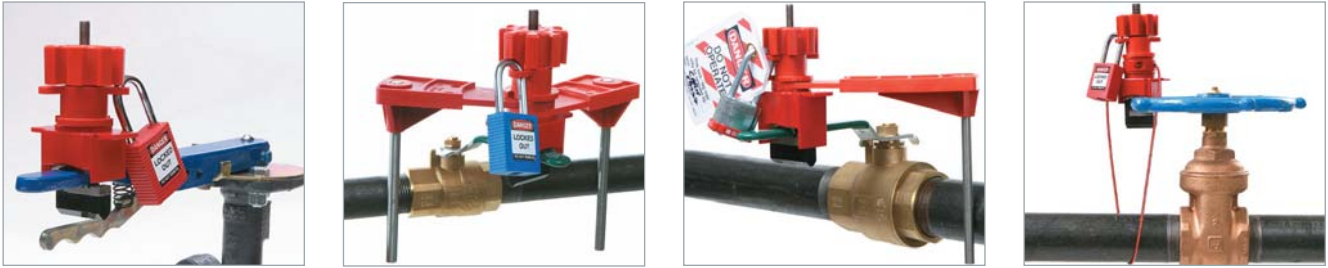

Electrical Risk Lockout

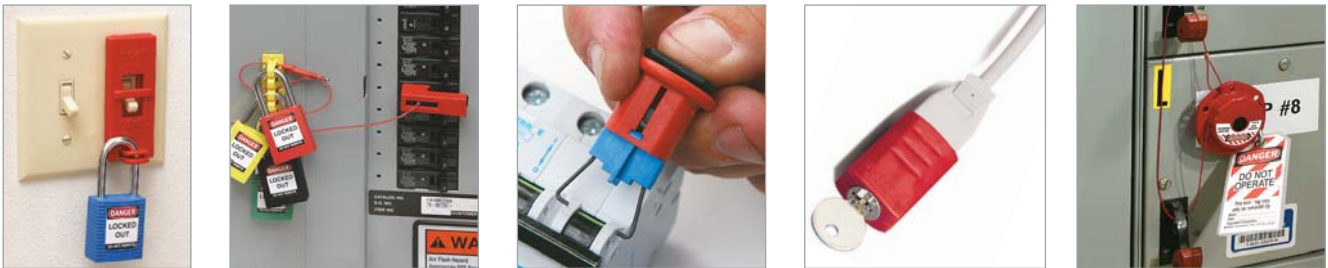

Mechanical Risk Lockout



Padlocks and Hasps



Lockout Stations









Lockout Bags



5 STEPS TO HELP YOU CHOOSE THE PADLOCKS YOU NEED

1. Define which type suits your application best, see the overview to help you out.
2. Define height and diameter of shackle (you will find this info with each LOTO device in this catalogue).
3. Choose a key system: Keyed Different, Keyed Alike, Master Keyed.
4. Choose the colour of the padlock.
5. Decide if the padlock needs to be engraved or not.

	 Safety Padlock Steel Shackle	 Safety Padlock Full Nylon	 Compact Safety Padlock
Body	Nylon	Nylon	Nylon
Shackle material	Steel	Nylon	Aluminium
Shackle diameter	6.5 mm	6.5 mm	4.7 mm
Shackle height	38 mm	38 mm	25 / 38 / 50 / 75 mm
Colours*	Black, Blue, Brown, Green, Grey, Orange, Purple, Red, Yellow, White	Black, Blue, Brown, Green, Grey, Orange, Purple, Red, Yellow, White	Black, Blue, Brown, Green, Grey, Orange, Purple, Red, Yellow, White
Identification	Supplied with labels (EN, FR)	Supplied with labels (EN, FR)	Supplied with labels (EN, FR)
Key possibilities	KD, KA, MK, GMK*	KD, KA, MK, GMK*	KD, KA, MK, GMK*
Main application	Industrial safety (process industry - custom applications)	Electrical, Small space areas	Electrical, Lockout ready equipment (5 mm holes) Lockout ready valves (5 mm holes)
Main features	<ul style="list-style-type: none"> • Non-conductive body • Key retaining system • High security (6-pins) 	<ul style="list-style-type: none"> • Full electrical resistance • None-sparking • Key retaining system 	<ul style="list-style-type: none"> • Non-conductive body • Compact & Light-weight • Key retaining system

	 Full Aluminium Padlock	 Laminated Steel Padlock	 Brass Padlock
Body	Aluminium	Steel	Brass
Shackle material	Aluminium	Steel	Brass
Shackle diameter	6.5 mm	7 mm	6.5 mm
Shackle height	25 / 40 / 75 mm	20 / 38 / 51 mm	21.5 mm
Colours*	Black, Blue, Green, Orange, Purple, Red, Yellow	Black, Blue, Brown, Green, Orange, Purple, Red, Yellow, White	Black, Blue, Green, Grey, Red, Yellow
Identification	Engraving (all sides)	Engraving (bottom)	Engraving (bottom)
Key possibilities	KD, KA, MK, GMK*	KD, KA, MK, GMK*	KD, KA*
Main application	Outdoor, high temperature (max. 580°C)	Severe physical environment, industrial safety	Flammable environment
Main features	<ul style="list-style-type: none"> • Corrosion resistance • Laser engraving 	<ul style="list-style-type: none"> • Physical resistance • Key retaining system 	<ul style="list-style-type: none"> • Spark resistant

*KD: Keyed Different - KA: Keyed Alike - MK: Master Keyed - GMK: Grand Master Keyed

KEY POSSIBILITIES




Keyed Different

Brady padlocks are supplied "keyed differently" when purchased from stock. This means that the key for one lock should not open another. Brady padlocks use 5- or 6-pin cylinders to offer high levels of safety and security. Both cylinders and keys are precision machined to exacting standards. This enables us to offer a greater number of unique keys than other locks with the same number of pins, making it highly unlikely that you will ever receive a duplicate lock. To guarantee that each lock is different, we can chart your locks, ensuring that each Brady padlock you receive is different from the others (contact your Brady distributor for more information).




Keyed Alike

When keyed alike, all locks in a set can be opened with the same key. This option is beneficial when multiple locks are assigned to a single employee.

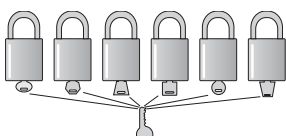

Master Keyed

A master key can be used to open multiple locks that are keyed differently. This allows supervisors to easily remove a lock in the event of an emergency. In order for employees to retain exclusive control, master keys should be kept in a secure location that is accessible only to management.



GRAND Master Keyed

The master key system can be extended to several teams. This way each team has a master key and all the locks of all the teams can be opened by a 'Grand' Master Key if necessary.


COMPACT SAFETY PADLOCKS

COMPACT & LIGHT-WEIGHT PADLOCKS - EASY TO USE FOR EFFECTIVE ENERGY CONTROL!



- Non-conductive nylon body and aluminium shackle
- Padlock only weighs 65 g
- Key retaining system
- Maximum Operation Temperature 120°C
- Colour coding allows for easy identification of Lockout teams during maintenance programs

Locks are supplied with **DANGER** and **PROPERTY OF** labels, 1 key for Keyed different.
Custom Keying options available.

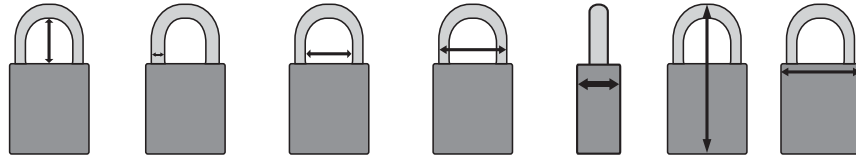

Order Reference	Colour	Shackle Height (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Packaging
Shackle Height 25 mm									
814114	Blue	25.00	4.70	17.00	26.00	17.00	60.00	33.00	6
814115	Black	25.00	4.70	17.00	26.00	17.00	60.00	33.00	6
814116	Red	25.00	4.70	17.00	26.00	17.00	60.00	33.00	6
814117	Yellow	25.00	4.70	17.00	26.00	17.00	60.00	33.00	6
814118	Green	25.00	4.70	17.00	26.00	17.00	60.00	33.00	6
814119	Orange	25.00	4.70	17.00	26.00	17.00	60.00	33.00	6
814120	Brown	25.00	4.70	17.00	26.00	17.00	60.00	33.00	6
814121	Purple	25.00	4.70	17.00	26.00	17.00	60.00	33.00	6
814122	White	25.00	4.70	17.00	26.00	17.00	60.00	33.00	6
814123	Grey	25.00	4.70	17.00	26.00	17.00	60.00	33.00	6
Shackle Height 38 mm									
814124	Blue	38.00	4.70	17.00	26.00	17.00	73.00	33.00	6
814125	Black	38.00	4.70	17.00	26.00	17.00	73.00	33.00	6
814126	Red	38.00	4.70	17.00	26.00	17.00	73.00	33.00	6
814127	Yellow	38.00	4.70	17.00	26.00	17.00	73.00	33.00	6
814128	Green	38.00	4.70	17.00	26.00	17.00	73.00	33.00	6
814129	Orange	38.00	4.70	17.00	26.00	17.00	73.00	33.00	6
814130	Brown	38.00	4.70	17.00	26.00	17.00	73.00	33.00	6
814131	Purple	38.00	4.70	17.00	26.00	17.00	73.00	33.00	6
814132	White	38.00	4.70	17.00	26.00	17.00	73.00	33.00	6
814133	Grey	38.00	4.70	17.00	26.00	17.00	73.00	33.00	6
Shackle Height 50 mm									
814134	Blue	50.00	4.70	17.00	26.00	17.00	85.00	33.00	6
814135	Black	50.00	4.70	17.00	26.00	17.00	85.00	33.00	6
814136	Red	50.00	4.70	17.00	26.00	17.00	85.00	33.00	6
814137	Yellow	50.00	4.70	17.00	26.00	17.00	85.00	33.00	6
814138	Green	50.00	4.70	17.00	26.00	17.00	85.00	33.00	6
814139	Orange	50.00	4.70	17.00	26.00	17.00	85.00	33.00	6
814140	Brown	50.00	4.70	17.00	26.00	17.00	85.00	33.00	6
814141	Purple	50.00	4.70	17.00	26.00	17.00	85.00	33.00	6
814142	White	50.00	4.70	17.00	26.00	17.00	85.00	33.00	6
814143	Grey	50.00	4.70	17.00	26.00	17.00	85.00	33.00	6
Shackle Height 75 mm									
814144	Blue	75.00	4.70	17.00	26.00	17.00	110.00	33.00	6
814145	Black	75.00	4.70	17.00	26.00	17.00	110.00	33.00	6
814146	Red	75.00	4.70	17.00	26.00	17.00	110.00	33.00	6
814147	Yellow	75.00	4.70	17.00	26.00	17.00	110.00	33.00	6
814148	Green	75.00	4.70	17.00	26.00	17.00	110.00	33.00	6
814149	Orange	75.00	4.70	17.00	26.00	17.00	110.00	33.00	6
814150	Brown	75.00	4.70	17.00	26.00	17.00	110.00	33.00	6
814151	Purple	75.00	4.70	17.00	26.00	17.00	110.00	33.00	6
814152	White	75.00	4.70	17.00	26.00	17.00	110.00	33.00	6
814153	Grey	75.00	4.70	17.00	26.00	17.00	110.00	33.00	6




FULL NYLON

THE ADDED ADVANTAGE OF BEING FULLY ELECTRICAL RESISTANT!

- The plastic shackle cuts off the electrical current from the shackle to the key
- Non-sparking
- Key retaining (Key won't release until padlock shackle is correctly closed)

Locks are supplied with **DANGER** and **PROPERTY OF** labels. Locks are supplied keyed differently. One key supplied with each padlock.



Order Reference	Colour	Shackle Height (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Packaging
Shackle Height 38 mm									
813593	Blue	38.00	6.50	18.50	31.50	16.00	87.00	38.00	6
813594	Red	38.00	6.50	18.50	31.50	16.00	87.00	38.00	6
813595	Black	38.00	6.50	18.50	31.50	16.00	87.00	38.00	6
813596	Yellow	38.00	6.50	18.50	31.50	16.00	87.00	38.00	6
813597	Green	38.00	6.50	18.50	31.50	16.00	87.00	38.00	6
813598	Orange	38.00	6.50	18.50	31.50	16.00	87.00	38.00	6
813639	Brown	38.00	6.50	18.50	31.50	16.00	87.00	38.00	6
813640	Violet	38.00	6.50	18.50	31.50	16.00	87.00	38.00	6
813641	White	38.00	6.50	18.50	31.50	16.00	87.00	38.00	6




SAFETY PADLOCKS WITH STEEL SHACKLE

UNIQUE CYLINDER ENHANCES SAFETY & SECURITY!

- Compact and light-weight with enhanced impact resistance
- Made of rugged reinforced nylon with hardened steel shackle
- Superior temperature, chemical and corrosion resistance
- Patented insulated key chamber protects workers from shocks when key is inserted
- 6-pin precision-machined cylinder offers more unique key cuts, better tamper-resistance
- Reserved, paracentric keyway provides optimal security
- Key retaining (Key won't release until padlock shackle is correctly closed)

Locks are supplied with **DANGER** and **PROPERTY OF** labels. Locks are supplied keyed differently. One key supplied with each padlock.



Order Reference	Colour	Shackle Height (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Packaging
Shackle Height 38 mm									
051339	Red	38.00	6.50	18.50	31.50	16.00	83.00	38.00	6
051344	Blue	38.00	6.50	18.50	31.50	16.00	83.00	38.00	6
051345	Green	38.00	6.50	18.50	31.50	16.00	83.00	38.00	6
051346	Yellow	38.00	6.50	18.50	31.50	16.00	83.00	38.00	6
051347	Orange	38.00	6.50	18.50	31.50	16.00	83.00	38.00	6
051353	Black	38.00	6.50	18.50	31.50	16.00	83.00	38.00	6
813636	Brown	38.00	6.50	18.50	31.50	16.00	83.00	38.00	6
813637	Violet	38.00	6.50	18.50	31.50	16.00	83.00	38.00	6
813638	White	38.00	6.50	18.50	31.50	16.00	83.00	38.00	6
814113	Grey	38.00	6.50	18.50	31.50	16.00	83.00	38.00	6




FULL ALUMINIUM PADLOCK

FULL ALUMINIUM PADLOCK MANUFACTURED WITH SOLID ALUMINIUM BODY AND SHACKLE, OUR PADLOCKS ARE AMAZINGLY LIGHT-WEIGHT AND RUGGED. LOCKS ARE CHEMICAL AND CORROSION RESISTANT AND FEATURE 6-PIN CYLINDERS FOR BETTER TAMPER-RESISTANCE.

- Aluminium shackle and body
- Corrosion resistance
- Laser engraving option
- Please contact customer services for Custom Key charting

Padlocks are supplied keyed different. 2 Keys supplied with each lock, NOT key retaining. Custom keying and charting is available.




Order Reference	Colour	Shackle Height (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Packaging
Shackle Height 25 mm									
814065	Blue	25.00	6.50	19.00	32.00	18.00	73.00	40.00	6
814066	Red	25.00	6.50	19.00	32.00	18.00	73.00	40.00	6
814067	Black	25.00	6.50	19.00	32.00	18.00	73.00	40.00	6
814068	Yellow	25.00	6.50	19.00	32.00	18.00	73.00	40.00	6
814069	Green	25.00	6.50	19.00	32.00	18.00	73.00	40.00	6
814070	Orange	25.00	6.50	19.00	32.00	18.00	73.00	40.00	6
814071	Purple	25.00	6.50	19.00	32.00	18.00	73.00	40.00	6
830936	Grey	25.00	6.50	19.00	32.00	18.00	73.00	40.00	6
830939	Brown	25.00	6.50	19.00	32.00	18.00	73.00	40.00	6
Shackle Height 40 mm									
814072	Blue	40.00	6.50	19.00	32.00	18.00	86.00	40.00	6
814073	Red	40.00	6.50	19.00	32.00	18.00	86.00	40.00	6
814074	Black	40.00	6.50	19.00	32.00	18.00	86.00	40.00	6
814075	Yellow	40.00	6.50	19.00	32.00	18.00	86.00	40.00	6
814076	Green	40.00	6.50	19.00	32.00	18.00	86.00	40.00	6
814077	Orange	40.00	6.50	19.00	32.00	18.00	86.00	40.00	6
814078	Purple	40.00	6.50	19.00	32.00	18.00	86.00	40.00	6
830937	Grey	40.00	6.50	19.00	32.00	18.00	86.00	40.00	6
830940	Brown	40.00	6.50	19.00	32.00	18.00	86.00	40.00	6
Shackle Height 75 mm									
814079	Blue	75.00	6.50	19.00	32.00	18.00	120.00	40.00	6
814080	Red	75.00	6.50	19.00	32.00	18.00	120.00	40.00	6
814081	Black	75.00	6.50	19.00	32.00	18.00	120.00	40.00	6
814082	Yellow	75.00	6.50	19.00	32.00	18.00	120.00	40.00	6
814083	Green	75.00	6.50	19.00	32.00	18.00	120.00	40.00	6
814084	Orange	75.00	6.50	19.00	32.00	18.00	120.00	40.00	6
814085	Purple	75.00	6.50	19.00	32.00	18.00	120.00	40.00	6
830938	Grey	75.00	6.50	19.00	32.00	18.00	120.00	40.00	6
830941	Brown	75.00	6.50	19.00	32.00	18.00	120.00	40.00	6



ULTIMATE SECURITY PADLOCK

- Shackle and body made of highest standard hardened alloy steel
- Abus-Plus 7 pin disk cylinder for ultimate protection against manipulation and key interchanges
- Locks are supplied with 2 keys

Locks are supplied keyed differently, keyed alike upon request



Order Reference	Colour	Shackle Height (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Packaging
805837	Black	26.00	11.00	27.50	49.50	31.00	85.00	63.00	3
805838	Black	50.00	11.00	27.50	49.50	31.00	109.00	63.00	3
805839	Black	75.00	11.00	27.50	49.50	31.00	134.00	63.00	1

LAMINATED STEEL PADLOCK

REINFORCED LAMINATED STEEL WITHSTANDS SEVERE PHYSICAL ABUSE AND HARDENED STEEL SHACKLE IS DIFFICULT TO CUT.

- Body plates individually coated for superior rust protection
- 5-pin cylinder offers more unique key cuts, better tamper-resistance than conventional 4-pin locks
- Coloured bumpers supplied for identification and protection
- Key retaining system (Key won't release until padlock shackle is closed)
- Engraving on Bottom & Key
- Please contact customer services for Custom Key Charting



Locks are supplied keyed differently.
1 key supplied with each padlock.



Order Reference	Colour	Shackle Height (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Packaging
Shackle Height 20 mm									
814086	Blue	20.00	7.00	18.50	32.50	26.00	63.00	40.00	6
814087	Black	20.00	7.00	18.50	32.50	26.00	63.00	40.00	6
814088	Red	20.00	7.00	18.50	32.50	26.00	63.00	40.00	6
814089	Yellow	20.00	7.00	18.50	32.50	26.00	63.00	40.00	6
814090	Green	20.00	7.00	18.50	32.50	26.00	63.00	40.00	6
814091	Orange	20.00	7.00	18.50	32.50	26.00	63.00	40.00	6
814092	Brown	20.00	7.00	18.50	32.50	26.00	63.00	40.00	6
814093	Purple	20.00	7.00	18.50	32.50	26.00	63.00	40.00	6
814094	White	20.00	7.00	18.50	32.50	26.00	63.00	40.00	6
Shackle Height 38 mm									
814095	Blue	38.00	7.00	18.50	32.50	26.00	75.00	40.00	6
814096	Black	38.00	7.00	18.50	32.50	26.00	75.00	40.00	6
814097	Red	38.00	7.00	18.50	32.50	26.00	75.00	40.00	6
814098	Yellow	38.00	7.00	18.50	32.50	26.00	75.00	40.00	6
814099	Green	38.00	7.00	18.50	32.50	26.00	75.00	40.00	6
814100	Orange	38.00	7.00	18.50	32.50	26.00	75.00	40.00	6
814101	Brown	38.00	7.00	18.50	32.50	26.00	75.00	40.00	6
814102	Purple	38.00	7.00	18.50	32.50	26.00	75.00	40.00	6
814103	White	38.00	7.00	18.50	32.50	26.00	75.00	40.00	6
Shackle Height 51 mm									
814104	Blue	51.00	7.00	18.50	32.50	26.00	86.00	40.00	6
814105	Black	51.00	7.00	18.50	32.50	26.00	86.00	40.00	6
814106	Red	51.00	7.00	18.50	32.50	26.00	86.00	40.00	6
814107	Yellow	51.00	7.00	18.50	32.50	26.00	86.00	40.00	6
814108	Green	51.00	7.00	18.50	32.50	26.00	86.00	40.00	6
814109	Orange	51.00	7.00	18.50	32.50	26.00	86.00	40.00	6
814110	Brown	51.00	7.00	18.50	32.50	26.00	86.00	40.00	6
814111	Purple	51.00	7.00	18.50	32.50	26.00	86.00	40.00	6
814112	White	51.00	7.00	18.50	32.50	26.00	86.00	40.00	6


BRASS PADLOCKS

LOCKS THAT WILL NEVER RUST


- Solid brass body and shackle
- Spark resistant ideal for use in flammable environments
- Corrosion resistant
- 6-pin cylinder offers more unique key cuts, better tamper-resistance
- Locks protected by coloured vinyl sheaths
- Two keys supplied with each lock



Locks are supplied keyed differently



Order Reference	Colour	Shackle Height (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Packaging
051354	Red	21.50	6.50	20.50	33.50	17.00	59.00	43.00	12
051355	Blue	21.50	6.50	20.50	33.50	17.00	59.00	43.00	12
051356	Green	21.50	6.50	20.50	33.50	17.00	59.00	43.00	12
051357	Yellow	21.50	6.50	20.50	33.50	17.00	59.00	43.00	12
051358	Grey	21.50	6.50	20.50	33.50	17.00	59.00	43.00	12
051359	Black	21.50	6.50	20.50	33.50	17.00	59.00	43.00	12




FULLY INSULATED LOCK

BODY AND SHACKLE FULLY INSULATED AGAINST ELECTRIC SHOCK

- Solid brass body
- Sealed lock body with cylinder cover to protect cylinder from dirt
- 5-pin cylinder
- Inner components made from non-corrosive materials
- Shock absorbing vinyl casing, also protects painted surfaces
- Hardened or stainless steel shackle
- Two keys supplied with each lock

Locks are supplied keyed differently, keyed alike upon request

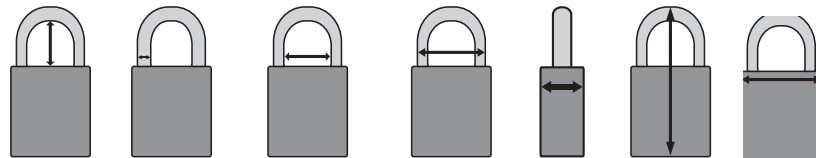


Order Reference	Colour	Shackle Material	Shackle Height (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Packaging
805835	Black	Hardened steel	24.50	8.50	20.50	37.50	28.00	73.00	53.00	6
805836	Blue	Stainless Steel	24.50	8.50	20.50	37.50	28.00	73.00	53.00	6




BRASS PADLOCK WITH STAINLESS STEEL SHACKLE

- Solid brass body (chrome plated) with stainless steel shackle
- Corrosion resistant
- Precision pin tumbler cylinder
- Two keys supplied with each lock

Locks are supplied keyed differently, keyed alike upon request

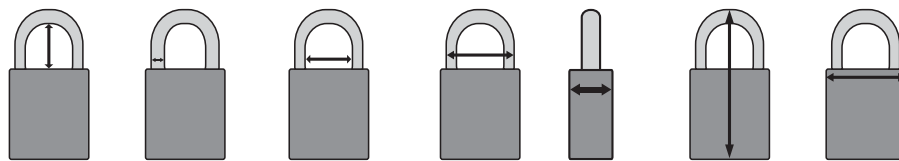


Order Reference	Colour	Shackle Height (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Packaging
805827	Chrome	14.50	5.00	14.50	24.50	12.00	47.00	30.00	6
805828	Chrome	23.50	6.50	19.50	32.50	13.00	66.00	39.00	6
805829	Chrome	38.00	6.50	19.50	32.50	13.00	83.00	39.00	6
805830	Chrome	27.00	7.00	28.00	42.00	15.00	73.00	49.00	6



BRASS PADLOCK WITH HARDENED STEEL SHACKLE

- All inner components are non-corrosive
- Brass body and hardened steel shackle
- Precision pin tumbler cylinder
- Two keys supplied with each lock

Locks are supplied keyed differently, keyed alike upon request.

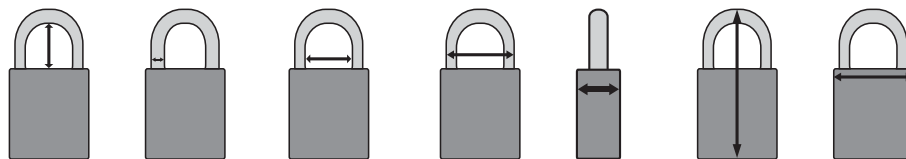

Order Reference	Colour	Shackle Height (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Packaging
805831	Brass	14.50	5.00	14.50	24.50	12.00	47.00	30.00	6
805832	Brass	23.50	6.50	19.50	32.50	13.00	66.00	39.00	6
805833	Brass	38.00	6.50	19.50	32.50	13.00	83.00	39.00	6
805834	Brass	27.00	7.00	28.00	42.00	15.00	73.00	49.00	6

LABELS FOR SAFETY PADLOCKS

- Safety padlock labels help send a clear message to workers when a machine is down for service or maintenance
- Labels are designed to fit Brady Safety Padlocks and are available in English

Order Reference	Text/Legend	Reverse Legend	Material	Brady Material No.	Packaging
051379	DANGER LOCKED OUT	PROPERTY OF	Vinyl	B-826	6



LABELS FOR ALUMINIUM PADLOCKS

- Made of durable vinyl
- Writable using pencil, pen or marker
- Contains front and reverse labels

Order Reference	Text/Legend	Reverse Legend	Material	Brady Material No.	Height (mm)	Width (mm)	Packaging
050289	DANGER LOCKED OUT	PROPERTY OF	Vinyl	B-826	20.32	27.94	6
050292	BLOQUEADO	PROPIEDAD DE	Vinyl	B-826	20.32	27.94	6
050293	VERROUILLÉE	PROPRIÉTÉ DE	Vinyl	B-826	20.32	27.94	6



LABELS FOR STEEL PADLOCKS

MADE OF DURABLE VINYL AND INCLUDE OVERLAMINATE STRIPS FOR ENHANCED DURABILITY.

- Writable using pencil, pen or marker
- Supplied with B-674 overlaminate strips for enhanced durability

Order Reference	Text/Legend	Reverse Legend	Material	Brady Material No.	Height (mm)	Width (mm)	Packaging
050280	DANGER LOCKED OUT	PROPERTY OF	Vinyl	B-826	19.05	114.30	6
050281	PELIGRO EQUIPO BLOQUEADO	PROPIEDAD DE	Vinyl	B-826	19.05	114.30	6
050283	DANGER VERROUILLÉE	PROPRIÉTÉ DE	Vinyl	B-826	19.05	114.30	6



“COBRA” CABLE

- Flexible steel wire with protective PVC coating

Order Reference	Description	Diameter (mm)	Length	Packaging
805844	“Cobra” Cable	8.00	2.0 m	1



MAXIMUM CHAIN SECURITY

- Chain made from hardened special chain steel
- Fabric sleeve protects paint work and chrome from damage

Order Reference	Description	Diameter (mm)	Length	Packaging
805846	Maximum Chain Security - 10 mm diam	10.00	1.1 m	2
805845	Maximum Chain Security - 8 mm diam	8.00	1.1 m	2






UNIVERSAL VALVE LOCKOUT

THE UNIVERSAL LOCKOUT DEVICE IS A MODULAR SYSTEM WHICH ENABLES YOU TO LOCK OUT VALVES OF DIFFERENT TYPES AND SIZES. NO OTHER DEVICE OFFERS SUCH FLEXIBILITY AND SECURITY. THERE ARE TWO SIZES AVAILABLE - LARGE AND SMALL.

- Modular system makes your investment economical and flexible
- Can be used to lock out large levers, T-handles and other hard-to-secure mechanical devices
- Open-ended clamp fits over closed rings and wide handles
- Locks out valves in open and closed positions
- Made from glass filled nylon for rugged durability, chemical and corrosion resistant

Order Reference	Description	Max. Handle Thickness (mm)	Max. Valve Handle Width (mm)	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Cable Length (m)	Packaging
065403	Large Blocking Arm	31.75	41.00	9.00	20.00	-	1
065401	Large Universal Valve Lockout Base + Arm	31.75	41.00	9.00	20.00	-	1
050899	Large Universal Valve Lockout Base Clamping Unit	31.75	41.00	9.00	20.00	-	1
065402	Small Blocking Arm	19.00	25.00	9.00	20.00	-	1
065400	Small Universal Valve Lockout Base + Arm	19.00	25.00	9.00	20.00	-	1
050924	Small Universal Valve Lockout Base Clamping Unit	19.00	25.00	9.00	20.00	-	1
051395	Cable attachment with 2.44 metre sheathed cable. Cable diameter 3.25 mm	-	-	-	-	2.44	1

The modular construction of the Universal Lockout allows the user to add various accessories to make the device suitable for a range of valves. Simply disassemble the device and slot in the relevant accessory.

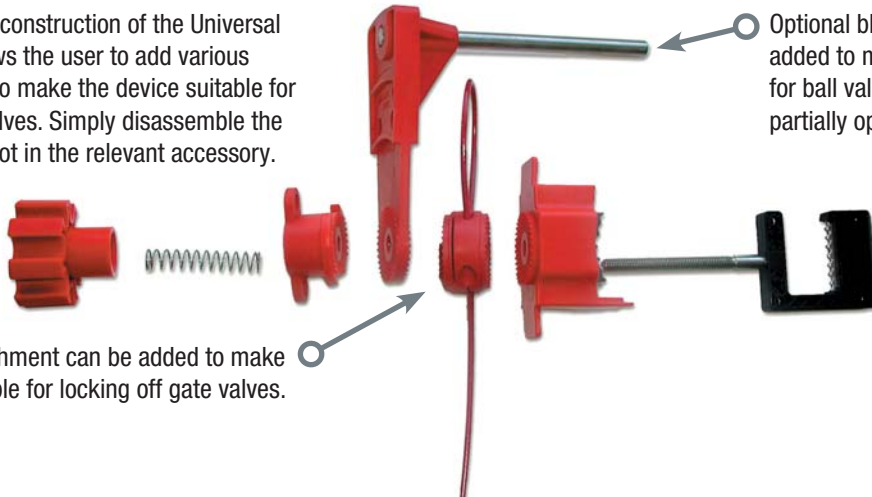

Optional blocking arm(s) can be added to make device suitable for ball valves in closed, open or partially open positions

Cable attachment can be added to make device suitable for locking off gate valves.



Clamp attaches to butterfly valve lever, preventing trigger handle from being squeezed. Valve cannot be repositioned!



Use blocking arm to lock out quarter-turn ball valves



Use cable attachment to lock out gate valves




Use two blocking arms to lockout 3-, 4- or 5-way valves, or to lock valves in the throttled position for operational control

BRADY BALL VALVE LOCKOUT

BRADY BALL VALVE LOCKOUTS ARE THE IDEAL TOOL FOR SECURING YOUR QUARTER-TURN BALL VALVES IN THE OFF POSITION.

- Fits virtually any valve lever up to 76 mm
- Available in 2 sizes
- Service Temperature from -30°C to 120°C

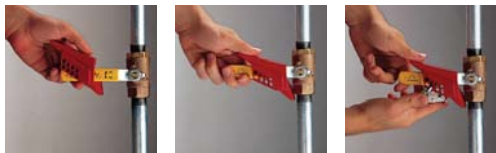

Order Reference	Description	Material	Max. Handle Thickness (mm)	Max. Valve Handle Width (mm)	Size valve lever (mm)	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	# of Holes	Packaging
065666	Small Brady Ball Valve Lockout	Nylon	7.62	30.48	6 - 25	7.00	25.00	8	1
065692	Small Brady Ball Valve Lockout	Steel	6.92	30.48	6 - 25	9.53	19.00	6	1
065669	Large Brady Ball Valve Lockout	Steel	12.70	53.34	32 - 76	7.00	19.00	15	1
065693	Large Brady Ball Valve Lockout	Steel	12.70	48.26	32 - 76	9.53	19.00	7	1

BALL VALVE LOCKOUT

VERSATILE AND EASY-TO-USE DEVICE. THE TWO HALVES OF THE DEVICE ENCOMPASS THE BALL VALVE LEVER TO SECURE IT FROM INADVERTENT ACTIVATION OF THE VALVE.

- Small device locks out pipes from 14.50 - 52.50 mm in open and closed position
- Large device locks out pipes from 50 - 200 mm in closed position
- Versatile and easy-to-use
- Made from ultra-tough polypropylene
- Service temperature from -20°C to 80°C

Order Reference	Colour	Pipe Diameter (mm)	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
Small					
800110	Red	14.50 - 52.50	7.24	38.00	1
805847	Blue	14.50 - 52.50	7.24	38.00	1
805848	Green	14.50 - 52.50	7.24	38.00	1
805849	Yellow	14.50 - 52.50	7.24	38.00	1
Large					
800111	Red	50 - 200	7.24	38.00	1
805850	Blue	50 - 200	7.24	38.00	1
805851	Green	50 - 200	7.24	38.00	1
805852	Yellow	50 - 200	7.24	38.00	1



NON-CONDUCTIVE BALL VALVE LOCKOUT

INTUITIVE AND EASY TO PLACE SAFETY DEVICE.

- Locks quarter-turn ball valves in OFF position
- Made from strong polypropylene plastic, resistant to cracking, abrasion and chemical products
- Resistant to extreme temperature -46°C to 183°C

Order Reference	Description	Colour	Height (mm)	Width (mm)	Size valve lever (mm)	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
225340	Non-Conductive Ball Valve Lockout	Red	125.00	95.00	190 - 250	7.00	20.00	1







ALL PURPOSE CABLE LOCKOUT

THE ERGONOMIC, HAND-FITTED BODY MAKES IT EASY TO TIGHTEN THE CABLE. CAN BE USED TO LOCK OUT VALVES, DISCONNECT SWITCHES, CIRCUIT BREAKERS AND MORE.

- Locks out multiple control points with a single device = reduced equipment costs
- Interchangeable cables, select the best type suited for the job
- High portability, a built-in eyelet helps keep the cable neatly coiled, prevents loose ends from dangling and causing a hazard when in use
- Body withstands chemicals and corrosion
- 4 Padlocks can be applied

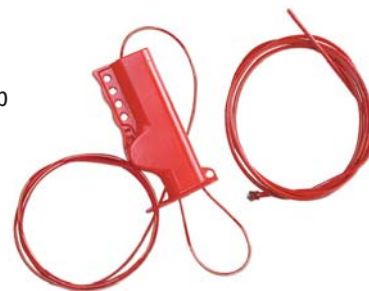

Order Reference	Specification	Material	Cable Length (m)	Colour	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Diameter (mm)	Packaging
050941	All Purpose Cable Lockout with Non-Conductive Nylon Cable	Glass-filled Polyurethane Polymer & Glass-filled Nylon & Non-Conductive Nylon	2.44	Red	7.00	20.00	3.18	1
050943	All Purpose Cable Lockout with Vinyl Coated Metal Cable	Glass-filled Polyurethane Polymer & Glass-filled Nylon & Vinyl Coated Metal	2.44	Red	7.00	20.00	3.18	1
050945	Non-Conductive Nylon Cable	Non-Conductive Nylon	2.44	Red	-	-	3.18	1
050948	Non-Conductive Nylon Cable	Non-Conductive Nylon	3.65	Red	-	-	3.18	1
050947	Vinyl Coated Metal Cable	Vinyl Coated Metal	2.44	Red	-	-	4.76	1
813642	Vinyl Coated Metal Cable	Vinyl Coated Metal	3.00	Red	-	-	4.00	1
050950	Vinyl Coated Metal Cable	Vinyl Coated Metal	3.65	Red	-	-	4.76	1

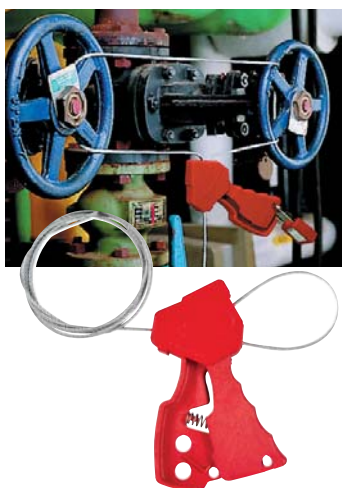

ORIGINAL CABLE LOCKOUT

BRADY'S ORIGINAL, PATENTED CABLE LOCKOUT DEVICE IS PERFECT FOR YOUR DIFFICULT LOCKOUT SITUATIONS SUCH AS LARGE GATE VALVES OR OVERSIZED DEVICES.

- Simply squeeze device to tighten cable, insert your padlock to secure the handle and you're done!
- Body is made of impact modified nylon
- Available in several colours
- Comes with galvanised steel cable

Order Reference	Specification	Colour	Height (mm)	Width (mm)	Cable Length (m)	Packaging
045191	Original Cable Lockout	Blue	182.70	72.00	1.8	1
045192	Original Cable Lockout	Yellow	182.70	72.00	1.8	1
065318	Original Cable Lockout	Red	182.70	72.00	1.8	1
065319	Additional Cable	Silver	-	-	1.8	1
065320	Additional Cable	Silver	-	-	3.0	1



MINI CABLE LOCKOUT

FITS IN THE PALM OF YOUR HAND AND IS EASILY STOWED AWAY IN YOUR TOOLBOX! ONE DEVICE FOR BOTH ELECTRICAL AND MECHANICAL LOCKOUT APPLICATIONS SAVES TIME AND MONEY.

- Locks out valves as well as disconnected switches and circuit breakers
- Cable stored internally: works just like a tape measure, prevents cable from getting tangled
- Push-button self-winding mechanism automatically holds cable tight
- Comes with vinyl-coated steel cable or non-conductive nylon cable
- The sheathed metal cable provides extra strength for getting a tight fit on valves and levers
- Superior chemical, corrosion and temperature resistance
- 6 Padlocks can be applied



Order Reference	Description	Cable Length (m)	Diameter (mm)	Depth (mm)	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Cable Diameter (mm)	Packaging
050940	Mini Cable Lockout with steel cable	2.44	100.00	45.00	7.00	20.00	1.60	1
051442	Mini Cable Lockout with nylon cable	2.44	100.00	45.00	7.00	20.00	1.60	1

UNIVERSAL VALVE LOCKOUT

LOCKOUT GATE VALVES USING THE CABLE ATTACHMENT WITH THE UNIVERSAL VALVE LOCKOUT.

- Locks out valves in open and closed positions
- Flexible modular system
- Made from industrial-grade steel and nylon for rugged durability, chemical and corrosion resistance
- Open-ended clamp fits over closed rings, wide handles




Order Reference	Description	Colour	Max. Handle Thickness (mm)	Max. Valve Handle Width (mm)	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
050899	Large Universal Valve Lockout Base Clamping Unit	Red	31.75	41.00	9.00	20.00	1
050924	Small Universal Valve Lockout Base Clamping Unit	Red	19.00	25.00	9.00	20.00	1
051395	Cable attachment with 2.44 metre sheathed cable. Cable diameter 3.25 mm	Red	-	-	-	-	1

PRO-LOCK II CABLE LOCKOUT DEVICE

THIS IS A COMPLETE ISOLATION SAFETY SYSTEM, IDEAL FOR SECURING VALVES OR INDUSTRIAL MACHINERY AND CAN ONLY BE OPENED AND LOCKED BY USING A SPECIAL TOOL.

- Polypropylene Moulding & Stainless Steel
- UV Stabilised
- Temperature resistance range: -50°C to 55°C

Other cable lengths are available upon request.

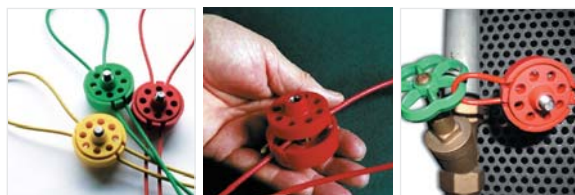

Order Reference	Specification	Colour	Cable Length (m)	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Diameter (mm)	Packaging
225203	Pro-Lock device with cable	Red	1.50	6.50	20.00	50.00	1
225204	Pro-Lock device with cable	Green	1.50	6.50	20.00	50.00	1
225205	Pro-Lock device with cable	Yellow	1.50	6.50	20.00	50.00	1
225206	Operating tool	Red	-	-	-	-	1
225207	Operating tool	Green	-	-	-	-	1
225208	Operating tool	Yellow	-	-	-	-	1




SCISSOR-LOK LOCKOUT DEVICE

LOCKS OUT MULTIPLE GATE VALVES SIMULTANEOUSLY. SECURES POWER CORDS, FREESTANDING EQUIPMENT, TANKS, CYLINDERS OR SAFETY GUARDS.

- Made of heavy-duty chemical resistant nylon
- Available with vinyl coated cable
- 3 padlocks can be applied. When using own cable, the outside diameter must be 4.76 mm or less

The cable and device can be combined in several ways (see examples).

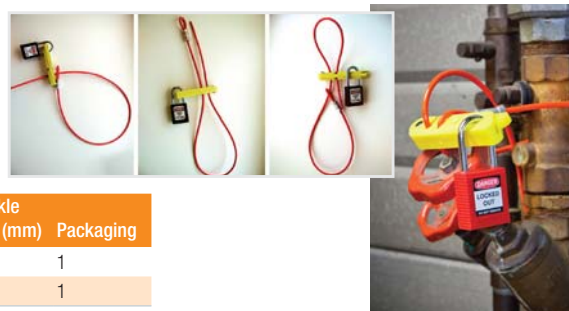

Order Reference	Specification	Cable Length (m)	Colour	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
236921	Scissor Lok Device with Cable	.91	Yellow	7.00	19.05	1
236922	Scissor Lok Device with Cable	3.04	Yellow	7.00	19.05	1


BRADY CABLE LOCKOUT DEVICE


LOCKS OUT GATE VALVES, GAS CYLINDERS, ELECTRICAL DEVICES AND MORE!

- Comes with steel cable and a unique hasp lockout device
- 6 padlocks can be applied.
- Service temperature from -20°C to 80°C

Do not forget to provide extra information by combining the device with a tag (see our Tags offer).

Order Reference	Specification	Cable Length (m)	Colour	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
800112	Cable Lockout Device with Cable	1.80	Red	8.00	15.00	1
800113	Additional Cable	1.80	Red	-	15.00	1
800114	Cable Lockout Device with Cable	3.00	Red	8.00	15.00	1
800115	Additional Cable	3.00	Red	-	15.00	1

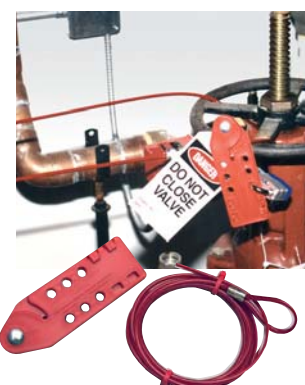



STANDARD GATE VALVE LOCKOUT


UNIQUE KNOCKOUT FEATURE! CAN BE REMOVED BY HAND TO ACCOMMODATE "RISING STEM" GATE VALVES.

- Locks out gate valves with different hand wheel diameters
- Made of durable polypropylene – superior impact & chemical resistance
- Withstands temperatures from -20°C to 80°C
- Available in several sizes and colours

Comes with danger labels in English, Spanish and French



Order Reference	Hand Wheel Diameter (mm)	Height (mm)	Width (mm)	Depth (mm)	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
Blue							
065585	25 - 64	80.00	120.10	35.90	9.70	38.00	1
065586	64 - 127	141.70	184.80	50.60	9.70	38.00	1
065587	127 - 165	181.00	224.10	60.40	9.70	38.00	1
065588	165 - 254	276.20	318.30	76.20	9.70	38.00	1
065589	254 - 330	363.50	405.10	76.20	9.70	38.00	1
Green							
065595	25 - 64	80.00	120.10	35.90	9.70	38.00	1
065596	64 - 127	141.70	184.80	50.60	9.70	38.00	1
065597	127 - 165	181.00	224.10	60.40	9.70	38.00	1
065598	165 - 254	276.20	318.30	76.20	9.70	38.00	1
065599	254 - 330	363.50	405.10	76.20	9.70	38.00	1
Red							
065560	25 - 64	80.00	120.10	35.90	9.70	38.00	1
065561	64 - 127	141.70	184.80	50.60	9.70	38.00	1
065562	127 - 165	181.00	224.10	60.40	9.70	38.00	1
065563	165 - 254	276.20	318.30	76.20	9.70	38.00	1
065564	254 - 330	363.50	405.10	76.20	9.70	38.00	1
Yellow							
065590	25 - 64	80.00	120.10	35.90	9.70	38.00	1
065591	64 - 127	141.70	184.80	50.60	9.70	38.00	1
065592	127 - 165	181.00	224.10	60.40	9.70	38.00	1
065593	165 - 254	276.20	318.30	76.20	9.70	38.00	1
065594	254 - 330	363.50	405.10	76.20	9.70	38.00	1

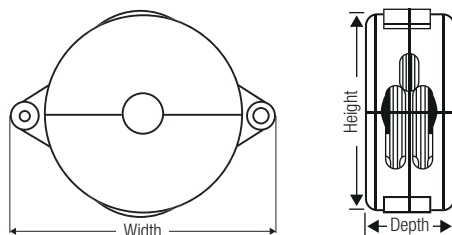

Why use different colours

- Valves in open or closed position: Red = open / Green = closed
- Indicate risk levels: Red = high risk / Blue = low risk
- Indicate substances flowing through a valve: Yellow = gas / Green = water
- Indicate different maintenance teams: Red = electricians / Blue = mechanics



ADJUSTABLE GATE VALVE LOCKOUT

ONE DEVICE FOR MOST GATE VALVES! IT REPLACES 3 CONVENTIONAL GATE VALVE LOCKOUTS TO REDUCE YOUR COSTS.

- Adjusts to fit gate valves from 2.5 to 16.5 cm
- Durable polypropylene
- Resistant to extreme temperature changes from -20°C to 80°C




Order Reference	Description	Height (mm)	Width (mm)	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
064057	Adjustable Gate Valve Lockout	130.00	209.00	9.40	20.00	1

BRADY BUTTERFLY VALVE LOCKOUT

IDEAL TO LOCK A BUTTERFLY VALVE IN THE OFF POSITION

- Can be used to lock a butterfly valve in the OFF position by clamping down on the handle so that it may not be engaged or moved
- Available in two sizes


Order Reference	Description	Specification	Colour	Packaging
121504	Small Butterfly Lockout	For valve handle thicknesses of 3.2 mm to 63.5 mm	Red	1
121505	Large Butterfly Lockout	For valve handle thicknesses of 50.8 mm to 102 mm	Red	1

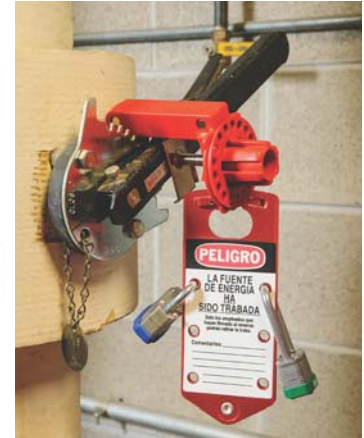

BUTTERFLY VALVE LOCKOUT

CREATED TO SECURE YOUR BUTTERFLY VALVE EFFICIENTLY!

- Made of strong polypropylene plastic
- Fully dielectric (non-conductive)
- Highly resistant to cracking and abrasion
- Highly resistant to solvents and other chemical products
- Resistant to extreme temperature changes from -46°C to 183°C
- 2 padlocks can be applied
- Available in several colours

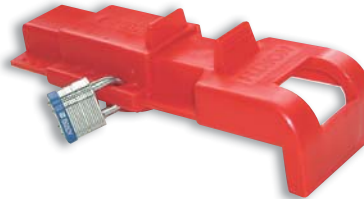


Order Reference	Description	Colour	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Height (mm)	Length (mm)	Width (mm)	Packaging
256960	Butterfly Valve Lockout	Red	8.00	25.00	70.00	305.00	102.00	1
256961	Butterfly Valve Lockout	Yellow	8.00	25.00	70.00	305.00	102.00	1
256962	Butterfly Valve Lockout	Green	8.00	25.00	70.00	305.00	102.00	1
256963	Butterfly Valve Lockout	Blue	8.00	25.00	70.00	305.00	102.00	1


UNIVERSAL VALVE LOCKOUT

USE THE UNIVERSAL VALVE LOCKOUT FOR LOCKING OUT BUTTERFLY VALVES!

- The clamp attaches to the butterfly valve lever, preventing the trigger handle from being squeezed
- The valve cannot be repositioned
- Rugged durability, chemical and corrosion resistance

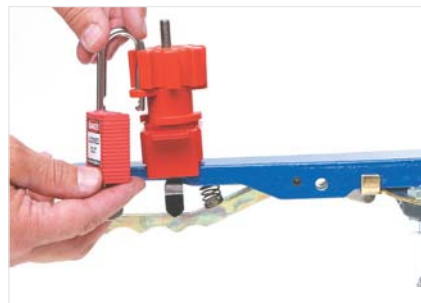

Order Reference	Description	Colour	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Max. Valve Handle Width (mm)	Max. Handle Thickness (mm)	Packaging
050899	Large Universal Valve Lockout Base Clamping Unit	Red	9.00	20.00	41.00	31.75	1
050924	Small Universal Valve Lockout Base Clamping Unit	Red	9.00	20.00	25.00	19.00	1

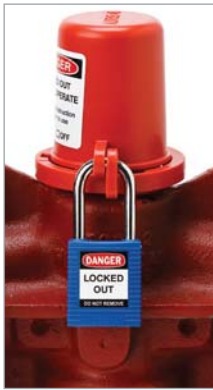

PLUG VALVE LOCKOUT

EFFECTIVE FIT FOR DIFFICULT-TO-SECURE PLUG VALVES

- Durable and tamper-resistant
- Compact in size and easy to use
- Several sizes to fit most 25 to 203 mm diameter manually-actuated plug valves.
- Service temperatures -20°C to 80°C



Order Reference	Specification	Material	Max. Shackle Diameter (mm)	Height (mm)	Diameter (mm)	Packaging
113231	Base Cover Plug Valve Lockout 22.23 mm	Polypropylene	9.30	76.20	81.40	1
113232	Base Cover Plug Valve Lockout 34.93 mm	Polypropylene	9.30	76.20	81.40	1
113233	Base Cover Plug Valve Lockout 53.98 mm	Polypropylene	9.30	101.60	119.60	1
113234	Base Cover Plug Valve Lockout 63.50 mm	Polypropylene	9.30	101.60	119.60	1



CYLINDER TANK LOCKOUT

REVOLUTIONARY NEW RUGGED POLYSTYRENE PLASTIC DEVICE IS USED TO LOCKOUT CYLINDER TANKS, INCLUDING PROPANE TANKS ON FORK LIFT TRUCKS AND STAND-ALONE PROPANE TANKS.

- Designed to fit in tight spaces
- Valve stem hole is 31.5 mm in diameter
- 2 padlocks can be applied.

Apply with ease to prevent access to the valve handle



Order Reference	Description	Colour	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
046139	Cylinder Tank Lockout	Red	6.50	20.00	1



GAS CYLINDER LOCKOUT

NO NEED TO MATCH YOUR LOCKOUT DEVICE TO VARYING DIAMETERS AND THREADS OF CYLINDER CAPS.

- Prevents access to the main cylinder valve
- Accommodates neck rings up to 88 mm diameter
- Install in seconds to save time
- 1 padlock can be applied



Order Reference	Description	Height (mm)	Diameter (mm)	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
045629	Gas Cylinder Lockout	158.80	88.10	7.00	20.00	1



PNEUMATIC QUICK-DISCONNECT LOCKOUT

ISOLATES PNEUMATIC ENERGY WITHOUT THE EXPENSE AND INCONVENIENCE OF INSTALLING IN-LINE LOCKOUT VALVES.

- Device is applied to the male fitting, isolating equipment from all compressed air sources.
- Accommodates the majority of 6 mm, 9 mm and 12 mm male fittings
- Hole in centre of device allows for permanent storage on air hose and a loop on the side can be used to hang the hose and lockout device



Order Reference	Description	Colour	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
064221	Pneumatic Quick-Disconnect Lockout	Red	7.84	20.00	1
065645	Pneumatic Quick-Disconnect Lockout	Red	7.84	20.00	6

MINIATURE CIRCUIT BREAKER

A SAFE AND EFFECTIVE METHOD FOR LOCKING OUT EUROPEAN CIRCUIT BREAKERS AS IT FITS MOST OF THEIR EXISTING TYPES.

- Miniature Breaker Lockout unique in its kind = requires NO TOOLS to install
- The lockout easily installs with the aid of a Push Button
- The Tie-Bar Style Lockout has a convenient thumb wheel for quick application
- Suitable for single and multi-pole breakers
- Made from glass-filled nylon
- Available in single pack or six pack

Recommended to use in combination with a padlock for added safety.



Order Reference	Description	Colour	Max. Shackle Diameter (mm)	Packaging
1/PC				
805853	Miniature Breaker Lockout Demo Kit	Black & Red	7.00	1
1/Pack				
090847	Miniature Circuit Breaker Lockouts - Pin-In Standard	Black & Red	7.00	1
090844	Miniature Circuit Breaker Lockouts - Pin-Out Standard	Black & Red	7.00	1
090850	Miniature Circuit Breaker Lockouts - Pin-Out Wide	Black & Red	7.00	1
090853	Miniature Circuit Breaker Lockouts - Tie-Bar	Black & Red	7.00	1
6/Pack				
090848	Miniature Circuit Breaker Lockouts - Pin-In Standard	Black & Red	7.00	6
090845	Miniature Circuit Breaker Lockouts - Pin-Out Standard	Black & Red	7.00	6
090851	Miniature Circuit Breaker Lockouts - Pin-Out Wide	Black & Red	7.00	6
090854	Miniature Circuit Breaker Lockouts - Tie-Bar	Black & Red	7.00	6

*Kit contains: 1 off each part: 090847, 090844, 090850, 090853



Pin-Out Standard

Pin-In Standard



Pin-Out Wide


Tie-Bar

UNIVERSAL MULTI-POLE BREAKER LOCKOUT

UNIVERSAL MULTI-POLE LOCKOUT WORKS WITH MOST TWO OR THREE POLE BREAKERS UTILISING A TIE-BAR.

- Compatible with GE, ITE, Sylvania, Challenger, Bryan, Westinghouse, General Switch Co. ...
- Use thumbscrews to clamp lockout securely over tie-bar, then insert lock to prevent clamp from being loosened
- Made of durable Moulded Glass-filled Nylon

Order Reference	Description	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
066320	Universal Multi-Pole Breaker Lockout	7.00	20.00	6
066321	Universal Multi-Pole Breaker Lockout	7.00	20.00	1

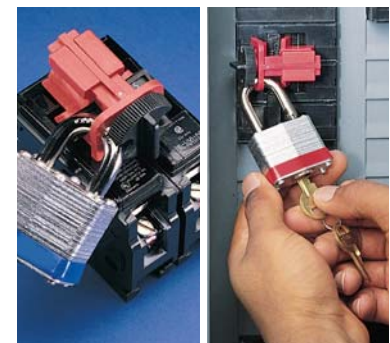


ECONOMY MULTI-POLE BREAKER LOCKOUT

ECONOMICAL SOLUTION DESIGNED TO FIT MULTI-POLE BREAKERS!

- Quick and easy to apply
- 1 padlock can be applied.

Order Reference	Description	Colour	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
805814	Economy Multi-Pole Breaker Lockout	Red	7.00	20.00	1

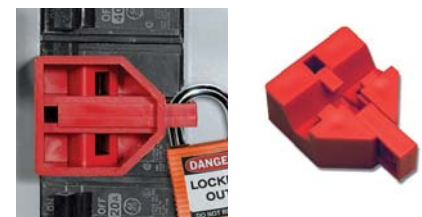

SINGLE MULTI-POLE BREAKER LOCKOUT

QUICK AND EASY – JUST SNAP IN PLACE AND APPLY A LOCK!

- Designed for breakers that have holes in the switch tongue
- Dual cavities accommodate different size switch tongues

Order Reference	Description	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Width (mm)	Depth (mm)	Packaging
065387	Single Pole Circuit Breaker Lockout	7.00	20.00	54.50	8.40	1
065688	Single Pole Circuit Breaker Lockout	7.00	20.00	54.50	8.40	6






480-600V BREAKER LOCKOUT

PERFECT FOR LOCKING OUT OVERSIZED AND IRREGULARLY SHAPED SWITCHES.

- Self adhesive backed rails are permanently installed onto an electrical panel – simply clean panel surface and adhere – no drilling required!
- Red blocking bar indicates locked “off”
- Green blocking bar indicates locked “on”
- Kit includes: 2 Yellow mounting rails, 1 red blocking bar, 1 green blocking bar and 3 alcohol wipes



Breaker Blocker Components - Blocking Bar Holder

Order Reference	Description	Colour	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Max. Switch Width (mm)	Packaging
090891	480-600V Breaker Lockout Kit		6.50	20.00	150.00	1
051264	Breaker Blocker Components - 101 mm Yellow Mounting Rails	Yellow	-	-	-	2
090893	Breaker Blocker Components - 190 mm Green Blocking Bar	Green	-	-	-	5
090892	Breaker Blocker Components - 190 mm Red Blocking Bar	Red	-	-	-	5
051265	Breaker Blocker Components - Blocking Bar Holder	Yellow	-	-	-	5



“NO-HOLE” CIRCUIT BREAKER LOCKOUT

EXTREMELY VERSATILE – WORKS ON WIDE RANGE OR SINGLE-POLE AND INTERNAL-TRIP MULTI-POLE BREAKERS.

- Use thumbscrews to clamp lockout securely onto switch tongue, then pull cover over thumbscrew and lock in place to prevent clamp from being loosened
- Made of rugged Polypropylene & Moulded Glass-filled Nylon
- Detachable cleats (included) expand the range of applicable breakers

Covering a breaker with a piece of duct tape to “lock it out” isn’t safe or effective and certainly doesn’t satisfy legislation. A Brady Lockout Device gives you a new level of safety and compliance.



Order Reference	Description	Height (mm)	Width (mm)	Depth (mm)	Max. Shackle Diameter (mm)	Max. Switch Width (mm)	Packaging
065404	Extra Cleats for 120/277V Lockout	50.74	28.70	7.37	-	-	6
065406	Extra Cleats for 480/600V Lockout	50.74	28.70	7.37	-	-	6
065396	No Hole Circuit Breaker Lockout - 277 Volt Device	24.10	56.00	25.40	7.00	16.00	1
065965	No Hole Circuit Breaker Lockout - 277 Volt Device	24.10	56.00	25.40	7.00	16.00	6
065397	No Hole Circuit Breaker Lockout - 480-600 Volts Device	40.30	82.60	55.20	7.00	38.00	1
065966	No Hole Circuit Breaker Lockout - 480-600 Volts Device	40.30	82.60	55.20	7.00	38.00	6



OVERSIZED BREAKER LOCKOUT DEVICE

- Oversized 480-600 Volt frame lockout, fits breakers up to 63.50 mm wide by 22.20 mm thick

Order Reference	Specification	Additional Information	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Max. Switch Width (mm)	Packaging
065321	Oversized Breaker Lockout Device	480-600 Volt, fits breakers up to 63.5 mm wide by 22.2 mm thick	7.00	20.00	57.15	6
065329	Oversized Breaker Lockout Device	480-600 Volt, fits breakers up to 63.5 mm wide by 22.2 mm thick	7.00	20.00	57.15	1



STOPOWER™ PLUG LOCKOUTS

DEVICE IS SIMPLE TO USE - JUST SLIDE OVER CORD PRONGS AND LOCK WITH KEY.

- Ideal for office equipment and other frequently locked out cords
- Cord cannot be plugged in with Stopower in place
- For use on 2 or 3 pronged polarised plugs
- Device cannot be removed without a key
- Standard devices are individually keyed

Order Reference	Description	Colour	Packaging
065673	Stopower Plug Lockout	Red	1

3-IN-1 ELECTRICAL PLUG LOCKOUT

ACCOMMODATES HIGH AND LOW-VOLTAGE PLUGS UP TO 76MM IN DIAMETER AND 139MM IN LENGTH.

- Two sliding top lids can be used individually or together to accommodate small, medium and large diameter cords up to 31mm
- Made in bright yellow thermoplastic
- With English instruction labels




Order Reference	Description	Colour	Height (mm)	Diameter (mm)	Cable Diameter (mm)	Packaging
045842	3-in-1 Electrical Plug Lockout	Yellow	158.75	88.14	31.00	1

LOCKOUT DEVICES FOR PLUG CONNECTIONS

HIGHLY EFFECTIVE AGAINST UNAUTHORISED OR INCORRECT USE OF ELECTRICAL EQUIPMENT.


- Simple to use
- Especially developed to secure all types of plugs

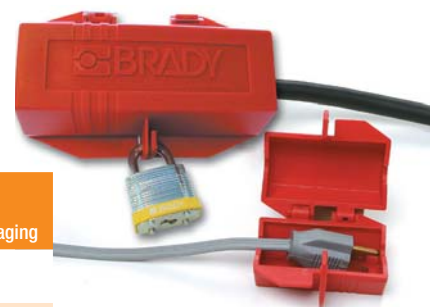

Order Reference	Description	Colour	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Width (mm)	Cable Diameter (mm)	Additional Information	Packaging
065675	Lockout Devices for Plug Connections - Large	Red	7.00	20.00	178.00	22.00	4 padlocks can be applied.	1
065674	Lockout Devices for Plug Connections - Small	Red	7.00	20.00	88.90	10.00	2 padlocks can be applied.	1

HUBBELL PLUGOUT FOR INDUSTRIAL PLUG CONNECTIONS

EFFECTIVELY SECURES ALL INDUSTRIAL PLUG CONNECTIONS.

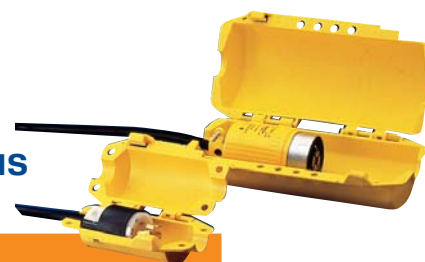


Order Reference	Specification	Colour	Height (mm)	Width (mm)	Plug Length (mm)	Plug Diameter (mm)	Max. Shackle Diameter (mm)	Cable Diameter (mm)	Min. Shackle Clearance (mm)	Additional Information	Packaging
065695	Hubbell Plugout - Small	Yellow	80.00	106.00	120.00	70.00	7.00	25.00	20.00	2 padlocks can be applied.	1
065968	Hubbell Plugout - Large	Yellow	120.00	120.00	250.00	100.00	7.00	35.00	20.00	4 padlocks can be applied	1

LARGE ELECTRICAL/PNEUMATIC LOCKOUT

ACCOMMODATES A LARGE VARIETY OF ELECTRICAL PLUGS UP TO 89 MM DIAMETER AND 127 MM IN LENGTH AS WELL AS MALE AIR HOSE CONNECTORS.

- Works on 110V, 220V and 550V plugs
- Made of Polystyrene material
- 4 padlocks can be applied

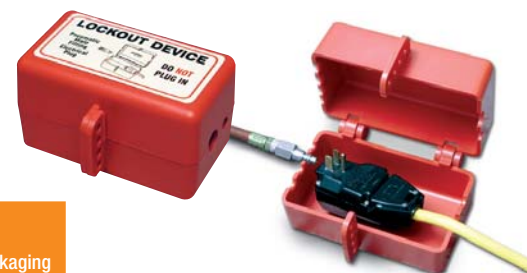

Order Reference	Description	Colour	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Plug Diameter (mm)	Plug Length (mm)	Packaging
800126	Large Electrical/Pneumatic Lockout	Red	7.00	20.00	89.00	127.00	1

LOCKOUT BAG

FOR SECURING PLUGS ON PORTABLE APPLIANCES, CABLES ON PNEUMATIC CONNECTORS, CRANE PENDANTS, ETC.

- Made of rugged canvas with drawstring
- Can be locked closed
- Legend: LOCK OUT FOR SAFETY

Order Reference	Description	Height (mm)	Length (mm)	Packaging
065780	Lockout bag made of rugged canvas with drawstrings	248.00	457.00	1



PUSH BUTTON LOCKOUTS

GUARD AGAINST UNAUTHORISED OPERATION OR ACCIDENTAL ACTIVATION.

- Two sizes to accommodate standard NEMA 30.5 mm and IEC 22.5 mm buttons
- Emergency Stop Safety Covers for permanent installation over push/pull or twist-release emergency stops - made from durable metal bar locks button in the depressed (off) position when lock shackle is inserted
- Push Button Safety Covers to completely cover buttons and prevent access.



Emergency Stop Safety Covers - IEC



Emergency Stop Safety Covers - NEMA



Push Button Safety Cover - IEC



Push Button Safety Cover - NEMA

Order Reference	Description	Height (mm)	Depth (mm)	Packaging
104601	Emergency Stop Safety Covers - IEC	33.80	41.90	1
104600	Emergency Stop Safety Covers - NEMA	33.80	41.90	1
104603	Push Button Safety Cover - IEC	58.40	34.10	1
104602	Push Button Safety Cover - NEMA	49.02	-	1



WALL SWITCH LOCKOUTS

WALL SWITCH LOCKOUTS MAY BE USED WITH MOST WALL-MOUNTED SWITCHES.

- Easy to install using existing screws
- Locks switch in "on" or "off" position
- High visibility colour
- Service temperature from -20 °C to 80°C

Order Reference	Description	Material	Text/Legend	Colour	Max. Switch Width (mm)	Packaging
065392	Wall Switch Lockout	Polypropylene	LOCKED ON / LOCKED OFF	Red	14.50	1



FUSE BLOCKOUT DEVICES

COMPLY WITH OSHA'S LOCKOUT/TAGOUT STANDARD BY USING HIGH VISIBILITY RED DEVICES IN CONJUNCTION WITH BRADY LOCKOUT TAGS.

- Block out 6 mm to 17.5 mm and blade type fuses

Order Reference	Description	Specification	Colour	Packaging
065691	Fuse blockout devices	For 20.6 mm, 27 mm, and blade type fuses	Red	6
065690	Fuse Blockout Devices	For 6.3 mm, 7.1 mm, 10.3mm, 14,3 mm fuses	Red	6



AC SENSORS

AC SENSOR WAS SELECTED BY OSHA ELECTRICAL TECHNICAL EQUIPMENT COMMITTEE AS THE ONLY INSTRUMENT OF ITS TYPE FOR USE BY OSHA COMPLIANCE OFFICERS TO IDENTIFY AND CITE ELECTRICAL HAZARDS OF 50 VOLTS OR MORE.

- Simple to use and lightweight
- 2 AAA 1.5 V batteries are included
- CAT IV rated and UL Listed

Order Reference	Description	Colour	Packaging
065269	AC Sensor	White on Red	1



LABELLED SAFETY LOCKOUT HASPS

COMBINATION OF LOCKOUT AND TAGOUT - ONE DEVICE FOR MULTI-TASK PERFORMANCE!

- A single employee can lock out and service equipment, and up to 5 additional employees can apply their locks and tags
- Tough 5052 anodised aluminium alloy
- Use pens, pencils and permanent markers
- Text from pens and pencils can be erased



Order Reference	Text/Legend	Colour	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Size W x D x L (mm)	Packaging
265390	DO NOT OPERATE	Red	8.00	20.00	76.20 x 4.70 x 184.10	5
265391	NICHT SCHALTEN	Red	8.00	20.00	76.20 x 4.70 x 184.10	5
265392	NIET BEDIENEN	Red	8.00	20.00	76.20 x 4.70 x 184.10	5
265393	NE PAS FAIRE FONCTIONNER	Red	8.00	20.00	76.20 x 4.70 x 184.10	5



LABELLED GROUP LOCKOUT HASPS

MAKE SURE YOUR WORKERS ARE SAFE BY SUPPLYING LABELLED LOCKOUT HASPS FOR ALL OF THEIR GROUP LOCKOUT PROCEDURES.

- Constructed from tough 5052 anodised aluminium alloy
- Includes tamperproof locking tabs
- Write-on label surface accepts pencils, pen or marker
- Pen and pencil markings can be easily erased, allowing repeated use
- Combination pack contains 1 off each colour
- Legend on the front side: DANGER DO NOT OPERATE
- Lock holes 8 mm
- 6 padlocks can be applied

Order Reference	Colour	Height (mm)	Width (mm)	Depth (mm)	Packaging
DANGER This energy source has been LOCKED OUT.					
065960	Red	180.00	76.00	5.00	5
065961	Silver	180.00	76.00	5.00	5
065962	Blue	180.00	76.00	5.00	5
065963	Green	180.00	76.00	5.00	5
065964	Gold	180.00	76.00	5.00	5
065967	1 each Red, Silver, Blue, Green & Gold	180.00	76.00	5.00	5

Order Reference	Colour	Height (mm)	Width (mm)	Depth (mm)	Packaging
DANGER Only the individual(s) who have signed below may remove this lock/tag.					
065970	Red	180.00	76.00	5.00	5
065971	Silver	180.00	76.00	5.00	5
065972	Blue	180.00	76.00	5.00	5
065973	Green	180.00	76.00	5.00	5
065974	Gold	180.00	76.00	5.00	5
065975	1 each Red, Silver, Blue, Green & Gold	180.00	76.00	5.00	5



BLANK SAFETY LOCKOUT HASP

- Made from aluminium
- Available in several colours
- 6 padlocks can be applied

Remember you can easily customise blank hasps with Brady labels.

Order Reference	Colour	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Size W x D x L (mm)	Packaging
225196	Silver	8.00	20.00	76.20 x 4.70 x 184.10	5
225198	Green	8.00	20.00	76.20 x 4.70 x 184.10	5
265399	Red	8.00	20.00	76.20 x 4.70 x 184.10	5



HEAVY DUTY STEEL LOCKOUT

TAMPER-PROOF DESIGN WHICH PREVENTS VANDALISM

- Solid U-shape steel bolt cannot be pried apart once locks are in place
- Holds up to 3 locks
- Inside diameter of U-shape bolt is 25.4 mm

Order Reference	Description	Max. Shackle Diameter (mm)	Min. Shackle Clearance (mm)	Packaging
230000	Heavy Duty Steel Hasp + 150 mm chain	9.00	20.00	1
236918	Heavy Duty Steel Hasp	9.00	20.00	1



Brady introduces a range of well-equipped Lockout Tagout kits. The kits are designed to help workers to establish an effective and safe lockout program, and help them comply with company lockout procedures as well as health and safety regulations. The range consists of several different Lockout Tagout kits, where each kit has been designed with a different need in mind.

Remember - an effective lockout procedure saves time, saves money and saves lives!

ULTIMATE LOCKOUT KIT

THIS IS OUR MOST EXTENSIVE LOCKOUT/TAGOUT KIT AND INCLUDES EVERYTHING A LARGER COMPANY MIGHT NEED FOR THEIR LOCKOUT/TAGOUT PROGRAM AS WELL AS TRAINING MATERIAL.

- Large Universal Valve Lockout base clamping unit
- Large blocking arm
- Cable attachment
- Adjustable gate valve device
- All Purpose Cable Lockout with sheathed metal cable
- Large plug lockout device
- Red butterfly valve lockout
- Cylinder tank lockout
- Gas cylinder lockout
- Mini cable lockout
- 227V “No-Hole” circuit breaker
- 480-600V “No-Hole” circuit breaker
- 480-600V Breaker blocker kit
- Miniature circuit breaker demo kit (1 of each type)
- Economy multi-pole breaker
- Nylon lockout hasp
- 1 pack of red safety padlocks
- 25 mm red safety lockouts (1 pack)
- Duffel bag
- “Do not operate” tag 75 x 160 mm
- Large lockout pouch
- Lockout belt pouch
- Pen

Order Reference	Description	Packaging
806178	Ultimate Lockout Kit	1



**BRADY
Customize-it**

**Interested in Custom Kits tailored to your needs?
Contact your Brady distributor or our customer service.**



ELECTRICAL LOCKOUT KIT

OUR ELECTRICAL LOCKOUT KIT GIVES YOU ALL THE BASICS TO LOCK OUT BREAKERS, ELECTRICAL PLUGS, WALL SWITCHES AND FUSES.

- Universal Multi-Pole Breaker
- “No-Hole” Circuit Breaker
- “No-Hole” Circuit Breaker (480-600V)
- 277V Lockout cleat
- 480-600V Lockout cleat
- Miniature Circuit Breaker Kit
- 2 red Brady Safety Padlocks
- Nylon Non-conductive Hasp
- Red Non-conductive Hasp
- Large red LOTO Pouch
- “Do not operate electrician at work” tag
- Pen

Order Reference	Description	Packaging
805909	Electrical Lockout Kit	1



VALVE AND ELECTRICAL LOCKOUT KIT

OUR COMBINATION LOCKOUT KIT GIVES YOU EVERYTHING YOU NEED TO LOCK OUT THE MOST COMMON MECHANICAL AND ELECTRICAL CONTROL POINTS.

- Large Universal Valve Lockout base clamping unit
- Large blocking arm
- Cable attachment
- Adjustable Gate Valve Device
- All Purpose Cable Lockout with sheathed metal cable
- Large Plug Lockout Device
- 227V “No-Hole” Circuit Breaker
- 480-600V “No-Hole” Circuit Breaker
- Economy Multi-Pole Breaker Lockout
- 480-600V Breaker Blocker Kit
- Miniature Circuit Breaker Demo Kit (1 of each type)
- Nylon Lockout Hasp
- 1 pack of red Safety Padlocks
- 25 mm red Safety Lockouts (1 pack)
- Duffel Bag
- “Do not operate” tag 75 x 160 mm
- Pen

Order Reference	Description	Packaging
806174	Valve and Electrical Lockout Kit	1



VALVE LOCKOUT KIT

CONTENTS:

- Large Universal Valve Lockout base clamping unit
- Large blocking arm
- Cable attachment
- Adjustable Gate Valve Device
- All Purpose Cable Lockout with sheathed metal cable
- 1 pack of red Safety Padlocks
- 25 mm red Safety Lockouts (1 pack)
- “Do not operate” tag 75 x 160 mm
- Red Lockout Satchel

Order Reference	Description	Packaging
806175	Valve Lockout Kit	1

SMALL ADJUSTABLE LOCKOUT KIT

OUR VALVE LOCKOUT KIT GIVES YOU EVERYTHING YOU NEED TO LOCK OUT GATE, BALL, BUTTERFLY AND OTHER VALVES

- Large Lockout Pouch
- Adjustable Gate Valve device
- All Purpose Cable Lockout with sheathed metal cable
- 2 red Brady Safety Padlocks
- 2 red Safety Lockouts (25 mm)
- Small Universal Valve Lockout base clamping unit
- Small blocking arm
- "Do not operate" tag 75 x 160 mm
- Pen

Order Reference	Description	Packaging
806176	Small Adjustable Lockout Kit	1



LOCKOUT INTRO KIT

OUR LOCKOUT INTRO KIT GIVES YOU EVERYTHING YOU NEED TO GET STARTED IN LOCKING OUT MOST COMMON MECHANICAL RISKS.

- Small Universal Valve Lockout (UVLO) base unit
- Small blocking arm for use with UVLO
- Cable for use with UVLO
- All Purpose Cable Lockout with sheathed cable
- 2 red Brady Safety Padlocks
- Large Lockout Pouch
- Tag - blank
- Pen

Order Reference	Description	Packaging
805877	Lockout Intro Kit	1



GATE VALVE LOCKOUT KIT

OUR GATE VALVE LOCKOUT SATCHEL KIT INCLUDES FIVE SIZES OF GATE VALVE LOCKOUTS IN A HANDY RED SATCHEL WITH A SHOULDER STRAP

- 25-64 mm red Gate Valve Lockout
- 64-127 mm red Gate Valve Lockout
- 127-165 mm red Gate Valve Lockout
- 165-254 mm red Gate Valve Lockout
- 254-330 mm red Gate Valve Lockout
- Red Lockout Satchel
- 1 pack of red Safety Padlocks
- "Do not operate" tag 75 x 160 mm

Order Reference	Description	Packaging
806177	Gate Valve Lockout Kit	1



MINI LOCKOUT STARTER KIT

CONTENTS:

- 2 x 25 mm Safety Lockouts (1 red + 1 yellow)
- 2 x 38 mm Safety Lockouts (1 red + 1 yellow)
- 6 x 38 mm Brady Safety Padlocks (one of each colour)
- 1 x Nylon Lockout Hasp

Order Reference	Description	Packaging
805856	Mini Lockout Starter Kit	1



BRADY
Customize-it

If you don't find that our pre-filled kits suit your requirements, **create you own** by buying one of these pouches or bags and fill with your own choice of lockout devices.



LOCKOUT BELT POUCH

SIMPLY FILL THE POUCH WITH THE LOCKOUT DEVICES YOU NEED AND HAVE THEM HANDY WHEN THEY ARE REQUIRED.

- Made of heavy duty nylon with loops for hanging on a belt

Order Reference	Description	Height (mm)	Width (mm)	Depth (mm)	Packaging
051172	Lockout Belt Pouch	120.00	190.00	50.00	1



LOCKOUT SATCHEL

- Made of 1000 denier red cordura nylon with a 95 cm shoulder strap
- Includes latchable front pocket and two side mesh holders

Order Reference	Description	Height (mm)	Width (mm)	Depth (mm)	Packaging
806200	Lockout Satchel	355.00	380.00	100.00	1



LARGE LOCKOUT POUCH

CREATE YOUR OWN CUSTOM LOCKOUT KIT AND USE THE POUCH TO STORE IT NEATLY.

- Made of nylon with attachment loop on back

Order Reference	Description	Height (mm)	Width (mm)	Depth (mm)	Packaging
050979	Large Lockout Pouch	203.00	178.00	76.00	1



LOCKOUT DUFFEL BAG

- Made of 600 denier polyester with a 95 cm removable shoulder strap and 8 inside pockets

Order Reference	Description	Height (mm)	Width (mm)	Depth (mm)	Packaging
099162	Lockout Duffel Bag	215.00	420.00	125.00	1

LOCK BOARDS

BRADY'S HIGH VISIBILITY LOCK BOARDS MAKE YOUR LOCKS, TAGS AND LOCKOUTS EASY TO FIND AND USE. BUILT FOR THE TOUGHEST CONDITIONS, THESE LOCK BOARDS ARE MADE OF DURABLE PLASTIC MATERIAL. **The lock boards are available as boards only. No components are included.**

Order Reference	Description	Material	Height (mm)	Width (mm)	Packaging
050989	5-Lock Board	Acrylic	292.00	393.00	1
050990	10-Lock Board	Acrylic	342.00	342.00	1
050991	20-Lock Board	Acrylic	597.00	292.00	1
050992	36-Lock Board	Acrylic	546.00	597.00	1



5-Lock Board



10-Lock Board



20-Lock Board




36-Lock Board

ADJUSTABLE LOCKOUT STATIONS

- Constructed of sturdy polystyrene with pre-drilled holes for easy wall mounting
- Pre-drilled pegboard-style holes for hooks
- Hooks can be arranged in a multitude of ways
- Available from portable to extra large sizes

The lockout stations are available as boards only. No components are included.

Order Reference	Description	Material	Height (mm)	Width (mm)	Depth (mm)	Packaging
050993	Adjustable Lockout Stations - Extra-Large Lockout Station	Sturdy Polystyrene	762.00	635.00	133.00	1
050994	Adjustable Lockout Stations - Large Lockout Station	Sturdy Polystyrene	660.00	495.00	127.00	1
050997	Adjustable Lockout Stations - Small Lockout Station	Sturdy Polystyrene	460.00	305.00	100.00	1
811217	Portable Lockout Station	Rust Proof Polypropylene	432.00	432.00	171.00	1



Adjustable Lockout Stations - Extra-Large Lockout Station



Adjustable Lockout Stations - Large Lockout Station



Adjustable Lockout Stations - Small Lockout Station



Portable Lockout Station

INDUSTRIAL STRENGTH LOCKOUT STATION

- Lockable all metal, yellow Powder-coated cabinet
- Lockout Safety Tips on inside of door
- Can hold a wide variety of lockout devices
- Can be wall mounted or easily transported

Order Reference	Description	Height (mm)	Width (mm)	Depth (mm)	Packaging
800123	Industrial Strength Lockout Station	406.00	355.00	152.00	1
800129	Industrial Strength Lockout Station - Additional Shelf	-	-	-	1





GROUP LOCK BOX

FOR GROUP LOCKOUT SITUATIONS INVOLVING A LARGE NUMBER OF WORKERS AND EQUIPMENT.

- After machine or process is locked out, the key or keys of the machine are placed in a lock box. Each authorised work team member places a personal lock or tagout device in the group lock box.
- Ensures that no single employee has access to the box unless ALL employees have removed their locks or tags



Order Reference	Material	Colour	Height (mm)	Width (mm)	Depth (mm)	Additional Information	Packaging
045190	Mild Sheet Steel	Blue	152.00	227.00	88.90	13 padlocks can be applied	1
065672	Mild Sheet Steel	Yellow	152.00	227.00	88.90	1 padlock can be applied	1
065699	Mild Sheet Steel	Red	152.00	227.00	88.90	13 padlocks can be applied	1
105717	Heavy Duty Powder-coated Steel	Red	229.00	381.00	229.00	Storage compartment holds approx. 125 padlocks. 34 padlocks holes in group lock box lid.	1



COMBINED LOCK STORAGE / GROUP LOCKOUT BOX

HANDY BOX FEATURES A LOCKABLE STORAGE COMPARTMENT AND A GROUP LOCKOUT COMPARTMENT.


- Made of heavy duty steel, powder-coated for extra rust resistance
- Group lockout compartment has clear Lexan window with keyhole slot
- Small size: Storage compartment holds approx. 50 padlocks. 17 padlocks holes in group lock box lid.
- Large size: Storage compartment holds approx. 125 padlocks. 34 padlocks holes in group lock box lid.

Order Reference	Specification	Colour	Height (mm)	Width (mm)	Depth (mm)	Packaging
105716	Small metal lock box	Red	162.00	300.00	67.70	1
105717	Large metal lock box	Red	229.00	381.00	229.00	1



WALL-MOUNTED GROUP LOCKOUT BOX

- Injection moulded using Isoplast polymers for rugged durability
- Excellent chemical and heat resistance and impossible to corrode
- Slot in front allows keys to be inserted when box is locked
- Transparent polycarbonate windows let you view content
- Pre-drilled holes in back allow for easy wall-mounting
- Lock rails hold up to 8 padlocks (locks not included)
- Box comes with 6 hooks for hanging keys, locks, etc. inside box



Order Reference	Specification	Colour	Height (mm)	Width (mm)	Depth (mm)	Packaging
050938	Plastic Lock Box	Red	157.48	101.60	139.70	1
050939	Extra Hooks	Black	-	-	-	12

WALL-MOUNTED METAL GROUP LOCKOUT BOX

- Made of durable, powder-coated steel with key slot on top
- Includes clear Lexan window that slides out when locks are removed
- Comes with key pegs and ID labels to simplify key management
- Pre-drilled holes and hardware included for quick mounting


Order Reference	Specification	Height (mm)	Width (mm)	Depth (mm)	Additional Information	Packaging
105714	Small metal wall lock box	178.00	203.00	57.15	7 padlocks can be applied	1
105715	Large metal wall lock box	178.00	406.00	57.15	12 padlocks can be applied	1



PORTABLE / WALL GROUP LOCKOUT BOX

- Made of yellow powder-coated metal
- Can be used alone or in combination with Industrial Strength Lockout Station
- Accommodates 8-10 locks (depending on lock size)

Order Reference	Description	Material	Colour	Height (mm)	Width (mm)	Depth (mm)	Packaging
046134	PRINZING Portable / Wall Group Lockout Box	Mild Sheet Steel	Yellow	151.00	354.50	73.40	1

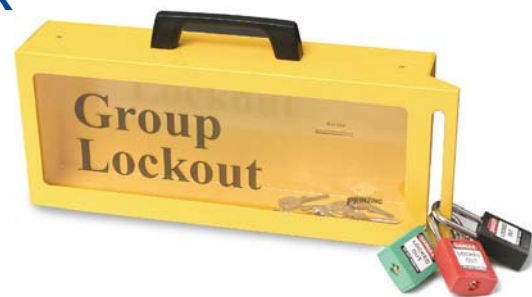

GROUP LOCKOUT CENTRE

- Apply a padlock to the key box to lock out multiple sources of energy controlled by the padlock keys inside the box
- 18 hooks for keys and 2 slots for locks (not included)
- Not designed to prevent forced entry

Order Reference	Description	Material	Colour	Height (mm)	Width (mm)	Depth (mm)	Packaging
800117	Group Lockout Centre - 3 hooks	Acrylic	Red	15.00	150.00	80.00	1
800116	Group Lockout Centre - 8 hooks	Acrylic	Red	195.00	305.00	64.00	1
800127	Group Lockout Centre - 18 hooks	Acrylic	Red	195.00	406.00	64.00	1



ENCLOSED PADLOCK STORAGE MODULES

PROVIDES SAFE STORAGE AND CONTROLS ACCESS TO PADLOCKS.

- Constructed of plastic with lockable, transparent acrylic doors
- Each metal hook can hold 2 locks
- Two sizes available for holding 16 or 40 padlocks
- Padlocks sold separately

Order Reference	Material	Colour	Height (mm)	Width (mm)	Depth (mm)	Packaging
065240	Sintra and Acrylic	White	381.00	381.00	88.90	1
065241	Sintra and Acrylic	White	381.00	762.00	88.90	1





PADLOCK CONTROL CENTRE

- Each nickel coated metal hook is large enough to hold two locks (not included)
- Two keys provided for cabinet lock

Order Reference	Description	Material	Colour	Height (mm)	Width (mm)	Depth (mm)	Packaging
800118	Padlock Control Centre - 18 hooks	Powder-coated Steel	Red	394.00	457.00	50.00	1
800119	Padlock Control Centre - 8 hooks	Powder-coated Steel	Red	254.00	305.00	50.00	1



PORTABLE PADLOCK STATION


- Holds up to 10 padlocks, 6 lockout hasps and 10 tags
- Made from polypropylene: light and rustproof
- Pre-drilled holes: easy to mount on wall
- Station is supplied without contents

Order Reference	Description	Material	Colour	Height (mm)	Width (mm)	Depth (mm)	Packaging
811218	Portable Padlock Station	Rust Proof Polypropylene	Yellow	178.00	337.00	64.00	1

PADLOCK STATIONS

- Steel padlock holder with red plastic coating
- Small holder allows up to 4 padlocks while large holder allows up to 24 padlocks

Order Reference	Description	Material	Colour	Height (mm)	Width (mm)	Depth (mm)	Packaging
800121	Large Padlock Station	14 gauge steel with plastic coating	Red	76.00	406.00	31.00	1
800120	Small Padlock Station	14 gauge steel with plastic coating	Red	57.00	76.00	31.00	1

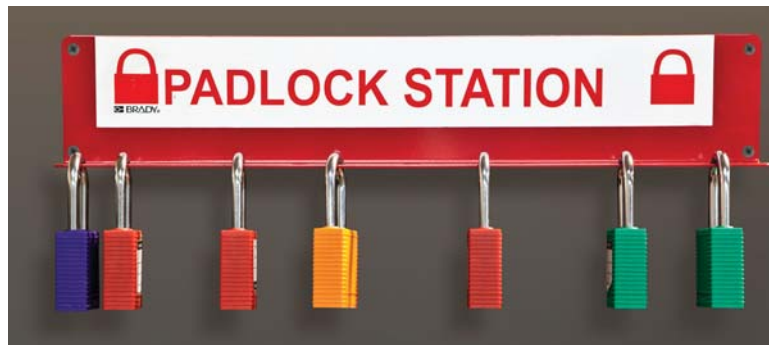




Tagout is the placement of a tag, which indicates that the energy-isolating device and the equipment being controlled **MUST NOT** be operated until the tag has been removed.

WARNING TAGS

INDICATE WHO IS RESPONSIBLE FOR PLACING A LOCKOUT DEVICE AND WHO IS AUTHORISED TO REMOVE IT OR MAKE CHANGES TO IT. THE TAGS ARE MANUFACTURED FROM A FLEXIBLE POLYESTER, RESISTANT TO WATER, OIL AND EXTREME TEMPERATURES. THEIR MATT SURFACE ALLOWS YOU TO WRITE ON THEM EASILY WITH A BALL POINT OR FELT-TIP PEN.


- Packaging: 10 tags with 10 cable ties

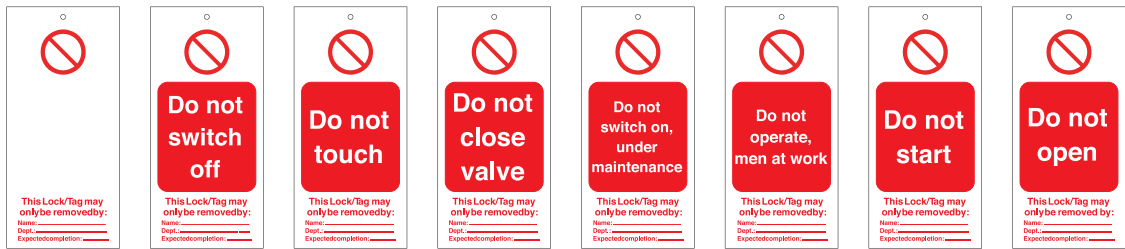

Height (mm)	Width (mm)	Order Reference							
110.00	50.00	225400	225401	225402	225403	225404	225405	225406	225408
160.00	75.00	262950	262951	262952	262953	262954	262957	265549	265550



Height (mm)	Width (mm)	Order Reference							
110.00	50.00	225409	225410	225411	225412	225407	225413	225414	225415
160.00	75.00	262962	262964	262965	256564	265548	256565	256566	256567

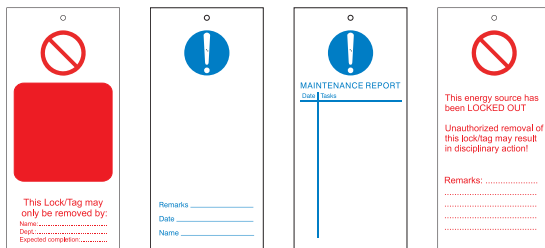

Height (mm)	Width (mm)	Order Reference			Reverse
110.00	50.00	225416	225418	225420	
160.00	75.00	256571	225417	225419	



Order Reference		
225421	225422	225423
256572	256573	256575



Height (mm)	Width (mm)	Order Reference					Reverse
110.00	50.00	225424	225425	225426	225427	225418	
160.00	75.00	256576	256577	256578	256579	256579	



Do not forget to order a Permanent Marker Pen (087052)



BRADY SAFETY TAGS

PROVIDE ON-THE-SPOT IDENTIFICATION OF SAFETY MEASURES!

- Easy application: can be attached in just seconds
- Tags have ties attached and can be applied to just about any part of any machine. No need for extra ties!
- The tag is printed on both sides, making sure the vital information is always visible
- Material: PVC 0.2 mm
- Size of attachment tie: 85.00mm x 145.00mm mm
- Packaging: 10 tags

Order Reference

DANGER 241700



Order Reference

DANGER Live wire 241710



Order Reference

Do not use out of order 241716



Order Reference

FAILED ELECTRICAL SAFETY TEST 241720



Order Reference

CAUTION Out of Order 241701



Order Reference

DANGER Contains asbestos 241712



Order Reference

Do not switch on 241717



Order Reference

TESTED FOR ELECTRICAL SAFETY 241721



Order Reference

CAUTION Men working on this equipment 241703



Order Reference

CAUTION Biohazard 241713



Order Reference

Do not switch on under maintenance 241718



Reverse

Order Reference

DANGER Electric shock risk 241708



Order Reference

DANGER Radioactive material 241714



Order Reference

Do not touch 241719



LAMINAT™ TAGS

SELF-SEALING MANILA TAGS FOR IDENTIFICATION OF MATERIAL IN TOUGH ENVIRONMENTS, INCLUDING VALVES, INSTRUMENTS, MOTORS AND OTHER INDUSTRIAL COMPONENTS.


- Laminat™ Manila Tags are recommended to be used together with Brady's assortment of labels
- Material: B-7645 Polypropylene with Polyester Overlaminat
- Colour: Yellow
- There are two versions of the tag, either supplied with or without stainless steel reinforcement ring

Order Reference	Height (mm)	Width (mm)	Seal-up Area Height (mm)	Seal-up Area Width (mm)	Additional Information	Packaging
620321	25.00	59.00	25	43		50
620322	25.00	59.00	25	43	Reinforced with Rivet	50
620323	25.00	150.00	25	135		50
620324	25.00	150.00	25	135	Reinforced with Rivet	50
622493	60.00	116.00	60	100	Reinforced with Rivet	50



MACHINE RELATED RISK WARNING TAGS

- Pre-printed warning layout and blank back
- B-851 Polyester Tag
- Packaging: 10 tags

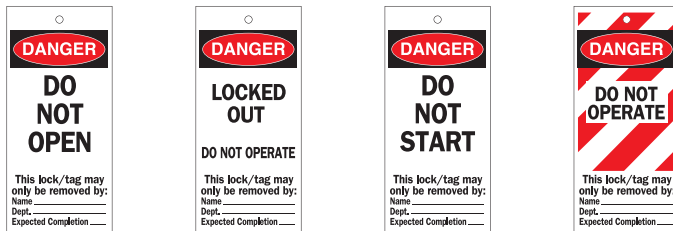

Height (mm)	Width (mm)	Order Reference
160.00	75.00	230778
		230779
		230780
		230781

MAGNETIC SIGNS

- Easy to apply and remove
- Packaging: 5 pieces




Height (mm)	Width (mm)	Order Reference
148.00	105.00	256964
		256965
		256966
		256967

COLOURED NYLON TIES

COLOURED NYLON TIES PROVIDE YOU WITH AN OPTION OF COLOUR CODED APPLICATION.

Order Reference	Colour	Length (mm)	Width (mm)	Packaging
229955	White	200.00	4.00	100
229956	Blue	200.00	4.00	100
229957	Red	200.00	4.00	100
229958	Orange	200.00	4.00	100
229959	Yellow	200.00	4.00	100
229960	Green	200.00	4.00	100
229961	Violet	200.00	4.00	100
229962	Black	200.00	4.00	100

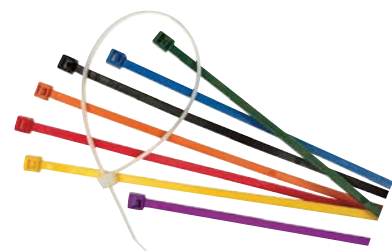



TAG HOLDER

- Compact - holds 50 tags, ties and marking pen (not included)
- Comes with adhesive strips and screws for mounting in a variety of ways
- Dimensions (H x W x D): 190.00 mm x 114.00 mm x 38.00 mm

No tags included.

Order Reference	Description	Material	Packaging
800125	Tag Holder	Clear Plastic	1



SAFETY TAG STATION

ORGANISE YOUR TAGS IN A CENTRAL POSITION!

- Material: Rugged Polycarbonate Plastic construction
- Accommodates 146 x 76 mm tags

No tags included.

Order Reference	Description	Material	Packaging
081773	10-Pocket Tag Safety Station	Rugged Polycarbonate	1

BRADY Customize-it

Brady Custom Tags

To produce your custom tag(s), Brady requires the following information for each type/design of the tag you need:

1. Select from the 3 basic types of tags: General Warning, Electrical Warning, Prohibition (see sample previews below)
2. Select the size (110 x 50 mm or 160 x 75 mm)
3. Indicate quantity of packs (1 pack consists of 10 pcs of tags and 10 pcs of cable ties)
4. Define your text for the box in the central area of the tag

Send your request for quotation containing all information listed above to your Brady representative or distributor



General Warning



Electrical Warning



Prohibition



Brady Sign and Label Printers with their industrial design and excellent printing outcomes are highly recommended for identification of LO/TO devices, lockout points, padlocks and keys.




BMP™21 LABEL PRINTER

Simple to operate and quick to print, the BMP21 is a labelling tool specifically designed for industrial environments. Several types of material in cartridges provides flexibility in usage wherever you need a durable label.

- 203 dpi printing resolution
- Prints on continuous tapes up to 19 mm wide

For more information about kits, please contact your nearest Brady representative.

Art. No.	Description
110889	BMP21 Label Printer
710537	BMP21 Safety Kit EU
710538	BMP21 Safety Kit UK
710662	BMP21-CYRILLIC-PRINTER



BMP™51/BMP™53 LABEL MAKERS

Brady BMP51/53 Label Makers offer crisp printing, easy formatting, convenient label sizes and portability to solve a number of identification tasks. Besides stand-alone and PC connected operation, it offers great option of wireless printing via BlueTooth® and WiFi. Free mobile application for Smartphones with Android OS is available on the internet.

- 300 dpi printing resolution
- Prints on labels and tapes up to 38 mm wide

Art. No.	Description
710894	BMP51 Printer with Battery Pack - AC Adaptor/Battery Charger - EU
710898	BMP51 Printer with Battery Pack - AC Adaptor/Battery Charger - UK
710895	BMP53 Printer with Battery Pack - AC Adaptor/Battery Charger - EU
710899	BMP53 Printer with Battery Pack - AC Adaptor/Battery Charger - UK





Reclaim Pump No. 12a LOCKOUT PROCEDURE

1. Notify all affected personnel
2. Bring machine to Zero Energy State by de-energizing
3. Test and verify zero energy state
4. Apply locks and tags
5. Perform schedule maintenance
6. Bring equipment back online
7. Notify all affected personnel

BMP™71 LABEL PRINTER

Brady's high-end portable label printer. Beside cable and wire printing solution for the telecom/datacom and electrical markets, the BMP71 is also perfect for printing health and safety signs and labels for the process industries.

The BMP71 is a user friendly printer with a large full colour LCD display, an easy-to-use menu driven user interface, and a full QWERTY keyboard layout making it quick and easy to create labels using text, symbols and coding. It can be used as stand-alone unit, as well as PC connected.



- 300 dpi printing resolution
- Prints on labels and tapes up to 50.8 mm wide

Art. No.	Description
710599	BMP71 Label Printer with QWERTY Keyboard - EU Power Supply - 220V*
710600	BMP71 Label Printer with QWERTY keyboard - UK Power Supply 240V
710601	BMP71 Label Printer with AZERTY Keyboard - EU Power Supply - 220V
710603	BMP71 Label Printer with QWERTZ Keyboard - EU Power Supply - 220V
710604	BMP71 Label Printer with CYRILLIC Keyboard - EU Power Supply - 220V

* Printer, Hard-sided Carry Case, 2 Label Rolls, 1 Black Ribbon Cartridge, Rechargeable Battery Pack, AC Adaptor, USB Communications Cable, TLS2200 / HandiMark Material Roll Adaptor, Quick Start Guide, Product CD (w/ Printer Driver, Tutorials, Full User's Guide), Cleaning Kit



BBP™31 AND BBP™33 SIGN AND LABEL PRINTER

Designed for ease of use and versatility, this monochrome printer features an intuitive touch screen display, simple label design and a wide variety of materials and applications.

Coined as “2-step printing,” this printer enables anyone to create labels without prior training. Simply type the desired text and hit the print button. With true “walk-up-and-print” functionality, everything that needs to be labelled in a facility actually gets labelled.

- 300 dpi printing resolution
- Prints on labels and tapes from 12.70 wide to 101 mm wide

Art. No.	Order Reference	Art. No.	Order Reference
710731	BBP™31 QWERTY UK PRINTER	711071	BBP33 EU Printer
710737	BBP™31 QWERTY EU PRINTER	711075	BBP33 UK Printer
710738	BBP™31 QWERTZ PRINTER		
710739	BBP™31 AZERTY PRINTER		
710740	BBP™31 CYRILLIC PRINTER		

GLOBALMARK® INDUSTRIAL LABEL MAKERS

Create your own custom signs, labels, pipe markers, tags and more on demand with the easy to use GlobalMark industrial label printer. Never before has an industrial-grade make-it-yourself printer empowered you to do so much with little more than your index finger.

Brady's advanced touchscreen technology, powered by a Microsoft Windows® CE operating system, makes producing professional labels as fast and simple as...Touch, Print, Presto! Printer is available in Monocolour, Multicolour and Colour & Cut versions.

- Stand-alone unit or connected to PC using MarkWare™ Facility Identification Software
- Over 700 built-in symbols
- 300 dpi printing resolution
- Prints on labels and tapes from 12.70 wide to 101 mm wide



Art. No.	Description
250352	GlobalMark Color & Cut English (UK) + MarkWare
250353	GlobalMark Color & Cut German + MarkWare
250354	GlobalMark Color & Cut French (AZERTY keyboard) + MarkWare
250355	GlobalMark Color & Cut Dutch (QWERTY keyboard) + MarkWare
250356	GlobalMark Color & Cut Dutch (B) (AZERTY keyboard) + MarkWare
250357	GlobalMark Color & Cut Spanish + MarkWare
250358	GlobalMark Color & Cut Italian + MarkWare
250359	GlobalMark Color & Cut Portuguese + MarkWare
250360	GlobalMark Color & Cut Swedish + MarkWare
250361	GlobalMark Color & Cut Finnish + MarkWare
250362	GlobalMark Color & Cut Norwegian + MarkWare
250363	GlobalMark Color & Cut Danish + MarkWare
250364	GlobalMark Color & Cut English - Export 110 V + MarkWare
250365	GlobalMark Color & Cut English - Export 220 V + MarkWare



POWERMARK® SIGN AND LABEL MAKER

PowerMark® allows your custom signs to be noticed with the use of multiple colour printing. This sign and label maker lets you create industrial strength signs and labels in up to four colours. Custom signs on demand, when you need them, the way you need them.

- Stand-alone unit or connected to PC using MarkWare™ Facility Identification Software
- Over 600 built-in symbols
- 300 dpi printing resolution
- Prints on labels and tapes from 101 mm wide to 254 mm wide



Art. No.	Description
240011	PowerMark English (UK) + MarkWare
240012	PowerMark German + MarkWare
240013	PowerMark French (AZERTY keyboard) + MarkWare
240014	PowerMark Dutch (QWERTY keyboard) + MarkWare
240015	PowerMark Spanish + MarkWare
240016	PowerMark Swedish + MarkWare
240017	PowerMark Finnish + MarkWare
240018	PowerMark Norwegian + MarkWare
240019	PowerMark Danish + MarkWare
240020	PowerMark Italian + MarkWare
240021	PowerMark Portuguese + MarkWare
240044	PowerMark Dutch (B) (AZERTY keyboard) + MarkWare
240046	PowerMark English 110 V + MarkWare
240233	PowerMark English 220 V + MarkWare



MARKWARE™ FACILITY IDENTIFICATION SOFTWARE

Ideal tool to quickly design professional looking signs, labels and tags. The MarkWare™ template wizard walks you through the creation process step by step, making the program easy enough for anyone to use without a lot of training. From simple labels to complex signs, MarkWare™ does it all - no need to learn and maintain different software programs.

Art. No.	Description
710669	MarkWare Industrial Signmaking Software



BRADY - YOUR COMPLETE WORK SAFETY SOLUTION PROVIDER

Find out more safety products from our extensive portfolio. Visit our websites or contact your nearest Brady representative.



SCAFFTAG - EQUIPMENT STATUS MANAGEMENT SYSTEMS

Provide essential records of the safe condition of all your site equipment and scaffolding.

- Simple to implement
- Easy for workers to understand
- Specially designed for rough environments
- Highly visible



SAFETY SIGNS - IMPORTANT INFORMATION AT THE POINT OF NEED

We offer more than 8,000 different signs for safety, maintenance and facility identification.

- Designed to withstand even the harshest industrial environments
- Bright colours, bold text and intuitive pictograms
- Compliant with the latest standards and regulations
- Highly visible and easy to understand communication



PIPE MARKERS - EASILY IDENTIFY PIPE CONTENT AND FLOW DIRECTION

The correct identification of pipes ensures a better insight into a building's structure. Accidents, injuries and damage can be prevented.



SORBENTS - SMART SPILL CONTROL

Clean, fast and safe removal of oil, water and chemicals spills.

- Adsorbs 10-25 times its own weight within a few seconds
- Environmentally friendly
- Spend less time cleaning

BRADY WHEN PERFORMANCE MATTERS MOST™

BRADY Africa
361 Olympic Duel,
Northlands Business Park
Newmarket Road
Randburg
Tel: +27 11 705 3295
Fax: +27 86 501 7775

BRADY Benelux
Industriepark C/3
Lindestraat 20
9240 Zele, Belgium
Tel. +32 (0) 52 45 78 11
Fax +32 (0) 52 45 78 12

Brady Central & Eastern Europe
Na Pántoch 18
831 06 Bratislava, Slovakia
Tel. +421 2 3300 4800
Fax +421 2 3300 4801

BRADY Denmark
Svendborgvej 39D
5260 Odense S
Tel. +45 66 14 44 00
Fax +45 66 14 44 50

BRADY France
Parc EURO CIT
45, avenue de l'Europe
59436 Roncq Cedex
Tel. +33 (0) 3 20 01 08 70
Fax +33 (0) 3 20 01 08 76

BRADY Germany
Büchenhöfe 2
63329 Egelsbach
Tel. +49 (0) 6103 7598 660
Fax +49 (0) 6103 7598 670

BRADY Hungary
Puskás Tivadar u. 4.
2040 Budaörs
Tel. +36 23 500 275
Fax +36 23 500 276

BRADY Italy
Via Degli Abeti 44
20064 Gorgonzola (MI)
Tel: +39 02 26 00 00 22
Fax: +39 02 25 75 351

BRADY Middle East FZE
PO BOX 18015
Jebel Ali, Dubai, UAE
Tel. +971 4881 2524
Fax +971 4881 3183

BRADY Norway
Lerstadveien 506
6018 Ålesund
Tel. +47 70 13 40 00
Fax +47 70 13 40 01

BRADY Spain & Portugal
Diputación, 260
08007 Barcelona, Spain
Tel. + 34 900 902 993
Fax + 34 900 902 994

BRADY Sweden
Vallgatan 5
170 67 Solna
Tel. +46 (0) 8 590 057 30
Fax +46 (0) 8 590 818 68

BRADY Turkey
Selvili Sok. No: 3/4
4. Levent Istanbul 34330
Tel. +90 212 264 02 20 / 264 02 21
Fax +90 212 270 83 19

BRADY UK & Ireland
Wildmere Industrial Estate
Banbury, Oxon - OX16 3JU, UK
Tel. +44 (0) 1295 228 288
Fax +44 (0) 1295 228 100

BRADY WORLDWIDE
Australia 612-8717-6300
Brazil 55-11-3686-4720
Canada 1-800-263-6179
China (Beijing) 86-10-6788-7799
China (Shanghai) 86-21-6886-3666
China (Wuxi) 86-510-528-2222
Hong Kong 852-2359-3149
Japan 81-45-461-3600
Korea 82-31-451-6600
Latin America 1-414-540-5560
Malaysia 60-4-646-2700
Mexico 525-399-6963
New Zealand 61-2-8717-2200
Philippines 63-2-658-2077
Singapore 65-6477-7261
Taiwan 886-3-327-7788
Thailand 66-2-793-9200
USA 1-800-537-8791

Your distributor