




RIV 4171

Ball valve F/F
 full bore
 steel lever handle


Tech drawings and tables



DN	Code	Ø	H	S	L	F	PN	KG	P/box
1/4"	024171000002	8	45	38	80	10	40	0,107	50
3/8"	024171000003	10	45	42	80	11	40	0,129	50
1/2"	024171000004	14,5	47	48	80	13	40	0,158	30
3/4"	024171000005	19	53	57	105	14	32	0,267	10
1"	024171000007	24	58	69	105	16,5	32	0,391	10
1"1/4	024171000008	30,5	69	79	120	18	25	0,621	8
1"1/2	024171000009	37	81	89	135	19	25	0,845	6
2"	024171000011	47	94	109	160	22,5	25	1,412	4
2"1/2	024171000013	60	106	126	160	23	25	2,100	1
3"	024171000014	75	142	147	265	25	16	3,716	1
4"	024171000016	94	160	177	265	29	16	6,111	1

Technical data

Art. 4170

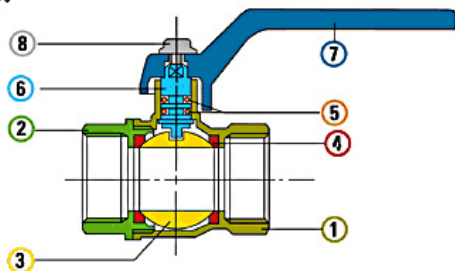

Materials

1	Body	Brass	CW617N	Nickel-plated
2	Body end	Brass	CW617N	Nickel-plated
3	Ball	Brass	CW617N	Chrome-plated
4	Seats	P.T.F.E.		
5	O-Ring	NBR		
6	Stem	Brass	CW614N	
7	Lever	Aluminium		Red
8	Screw	Steel		Zinc-plated

Connections

ISO 228/1, ANSI B1.20.1 (NPT)


Limit

-20°C (without liquid) +110°C


Notes

The max.working pressure (PN) means at a room temperature of about 23°C.

Pressure Loss Chart

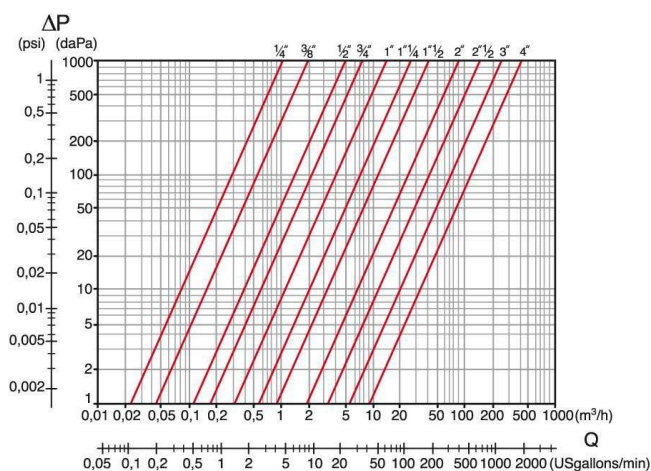

Temperature/Pressure

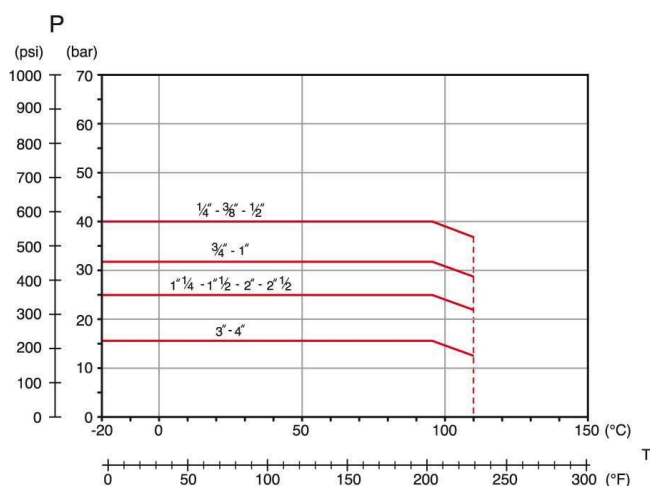

Kv & Cv Coefficients

Size	Kv	Cv
1/4"	3,6	4,2
3/8"	6,6	76,0
1/2"	16,5	19,1
3/4"	25,0	29,0
1"	46,0	53,0
1"1/4	87,0	101,0
1"1/2	140,0	162,0
2"	275,0	318,0
2"1/2	500,0	578,0
3"	850,0	983,0
4"	1350,0	1562,0

Approvals



RIV Rubinetterie Italiane Velatta S.p.A. - Via delle Acacie, 8 Zona Industriale D4 - 28075 GRIGNASCO (NO) - ITALY
 Tel +39 0163 4151 Fax +39 0163 411914 E-mail riv-vg@riv-vg.com Web www.riv-vg.com

Capitale sociale € 516.000 i.v. - Reg. Imprese di Novara N° 00469610026 - R.E.A. di Novara N° 170397
 Numero Meccanografico NO009263 - Codice Fiscale: 00469610026 - Partita IVA: IT 01399720034

